1. Functioning of Public Works Department at Government level.

Two Secretaries [Secretary (Roads) and Secretary (Works)] are the high level Administrative Officers who works under the control of Hon. Minister and Minister of State for Public Works Department at Government level. Different policy decisions, technical resolutions, budget of Public Works Department, constructions of State Highways and other roads, Government buildings, maintenance of the same etc. are dealt with at Government level.

1.1 Budget :

Road Development Plan for 20 years is prepared by the Government taking into consideration needs of the roads in the State. For the implementation of the plan, the works of Roads, Bridges and Buildings are included in the budget. Progress of the works is reviewed regularly in accordance with the availability of funds. In addition to Government funds, the necessary required funds are also raised with the help of NABARD, HUDCO and through BOT depending upon scope of works.

1.2 Approval to road maintenance and repairs programme.

The annual programme for maintenance and repairs of different roads is prepared at field level. The funds are made available after sanctioning the programme at Government level. The priority is given to the demands of people's representatives and urgent needs of users. Guidelines in this respect by Government.

1.3 Functions regarding Legislative Assembly and Legislative Council.

Three sessions (March, July and December) of Legislative Assembly and Legislative Council are held every year. Question and answer budget, supplementary demand, resolutions etc. are dealt with at Government level in these sessions.

1.4 Transfers of Officers

Class-I and Class II Officers are transferred according to the Maharashtra Government, G.A.D. Circular dated 12.05.2006 as per rule-2005.

1.5 Promotions of Officers

Officers are promoted according to the vacancies of post and the seniority list published from time to time for different cadres.

2.1 Road Development Plan (20 Years Plan)

The previous Road Development Plans were not only limited to the available funds for construction but for road development also. Therefore while preparing the 1981-2001 Road Development plans, it was envisaged of idea of master plan which would consider the expectations of common peoples of rural area without limitations of finance. The prime objective of midterm review of 1981-2001 Road Development Plan was the financial development of rural area of the country and the development of villages and small towns. This would help to stop the inflow of the people from villages to the small or big cities. The importance is given to the improvement of living standard of villagions. To achieve this target, all villages will be connected by all weather Roads. Government is emphasizing on common need and expectations of rural area.

Important objectives of 1981-01 Road Development Plan (Reviewed Plan) are as under-

A) Network of National Highways comparising 100 kms wide area.

B) Construction of Express Highways for high intensity zone for fast communication.

C) Connecting District head quarters, sub divisional head quarters, major industrial centers, commercial centers, tourist places, major agricultural business centers and ports etc. by State Highways.

D) Connecting all cities to N.H. ways or S.H. ways by road network Connecting all villages having population 1500 & more by M.D.R. network.

E) Villages having population between 1000 to 1500 be connected by other district roads.

F) At least one all weather road to every village.

G)Construction of 'Sakavs' to villages situated in hilly and inaccessible areas where agricultural and other facilities are located beyond river / creek.

Road Development Plan 2001-2021

Government of India has published Road Development Vision-2021 in November 2001. According to the guidelines mentioned Road Development Plan. 2001-2021 is being prepared.

The main targets as per vision-2021 are as below –

1. **Express Ways**

   All expressways are to be included in Road Development Plan 2001-2021 which were not included in 1981-2001. Four-laning of the high density National Highway corridors to be completed by 2021.

2. **National Highways**

   Important state Highways to be proposed for upgradation as National Highways.

3. **State Highways**

   Connectivity major ports, industrial complexes, important growth nodes, pilgrimage and tourist centres. Two laning to roads connecting District Head uarters and minimum Intermediate lane roads to Taluka places connecting District Head Quarters. Two laning to be completed by 2021. All District Head Quarters should have ring roads around city and Taluka places should have bypass outside town.

4. **Major District Roads**

   Major District Road should pass through villages having population more than 1500 & important market places. Major District Roads having very heavy traffic should either be two lane or four lane.

5. **Other District Roads**

   The other District Roads should pass through the villages having population 1000 to 1500.

6. **Village Roads**

   Non plan roads which are developed and sanctioned should be included as plan village roads.

7. **Village Connectivity**

   100% villages to be connected having population more than 500 as per census 2001 and 50% villages to be connected having population 200 to 500. The villages having population upto 500 should have at least one all weather road and to be connected by 2010 under Pradhan Mantri Gram Sadak Yojna (PMGSY).

2.2 Geometrical Standards

Sr. No.		Express High Ways	N.H.	S.H.	M.D.R.	O.D.R.	V.R.
1	**2**	**3**	**4**	**5**	**6**	**7**	**8**
1.	**Control line** (Factory,Picture Hall, Commercial Godowns, Market etc.), (in meter from centre line of road)						
	(A)Open area and agriculture zone (including built-up area in such country)	60 metres from centre of the road or 15 metres from road land whichever is more	75.00	50.00	47.00	30.00	25.00
	(B) Urban (built-up)area and industrial areas	--do--	37.00	37.00	37.00	18.00	14.00
2	***Building line*** **(in metres) on each side of the centre line of the road**						
	(A)Open area and agriculture zone (including built-up area in such country)	--do--	40.00	40.00	30.00	15.00	12.00

Sr. No.		Express High Way	N.H.	S.H.	M.D.R.	O.D.R.	V.R.
1	**2**	**3**	**4**	**5**	**6**	**7**	**8**
	(B) Urban (built-up) industrial area	--do--	3 to 6 m.from boun-dary of the road	20 m.from centre line or 4.5 m. away from boun-dary of the road which-ever is more	15 m. from centre line or 4.5 m.away from bound-ary of the road whiche-ver is more	12 m.from centre line or 4.5 m.awa y from boun-dary of the road whiche ver is more	10 m.from centre line or 3.0 m.aw-ay from boun-dary of the road which-hever is more
3	***Road land*** **(overall) (in metres)**	20 mt. from centre or 4.5 mt.from Rd.boun-dry which ever is more					
	(A) Open area and agriculture zone country (including built-up area in such country)						
	Range		30.00 to 60.00	30.00 to 60.00	25.00 to 30.00	15.00 to 25.00	12.00 to 18.00
	Normal		45.00	45.00	25.00	15.00	12.00
	(B) Urban (Built - up) industrial area						
	Range		30.00 to 60.00	30.00 to 60.00	15.00 to 25.00	15.00 to 20.00	10.00 to 15.00
	Normal		30.00	30.00	20.00	15.00	10.00
4	***Design speeds*** **(Kms./Hour)**						
	(I) Plain terrain						
	(a) Ruling speed		100.00	100.00	80.00	65.00	50.00
	(b) Minimum design speed		80.00	80.00	65.00	50.00	40.00

Sr. No.		Express High Way	N.H.	S.H.	M.D.R.	O.D.R.	V.R.
1	**2**	**3**	**4**	**5**	**6**	**7**	**8**
	(ii) Rolling Terrain						
	(a) Ruling design speed		80.00	80.00	65.00	50.00	40.00
	(b) Minimum design speed		65.00	65.00	50.00	40.00	35.00
	(iii) Hilly or Mountainous terrain						
	(a) Ruling design speed		50.00	50.00	40.00	30.00	25.00
	(b) Minimum design speed		40.00	40.00	30.00	25.00	20.00
	(Ruling design speeds are recommended as standard design speed)						
5	***Gradients***						
	(i) Ruling gradients						
	(a) Plan terrain		1 in 30	1 in 30	1 in 30	1 in 30	1 in 30
	(b) Hilly or mountainous terrain		1 in 20	1 in 20	1 in 20	1 in 20	1 in 20
	(ii) Limiting gradients						
	(a) Plan terrain		1 in 20	1 in 20	1 in 20	1 in 20	1 in 20
	(b) Hilly or mountainous terrain		1 in 14.3	1 in 14.3	1 in 14.3	1 in 14.3	1 in 14.3
	(iii) Exceptional gradients (steep terrain up to 3000 metres above).						
	(a) Plain terrain		1 in 15	1 in 15	1 in 15	1 in 15	1 in 15
	(b) Hilly terrain		1 in 12.5	1 in 12.5	1 in 12.5	1 in 12.5	1 in 12.5
6	***Horizontal curves radius*** **(in metres)**						
	(i) Flatter rolling country						
	(a) Absolute minimum		Not less than 230	Not less than 230	Not less than 155	Not less than 90	Not less than 60
	(b) Ruling minimum		Not less than 360	Not less than 360	Not less than 230	Not less than 155	Not less than 90

Sr. No.		Express High Way	N.H.	S.H.	M.D.R.	O.D.R.	V.R.
1	**2**	**3**	**4**	**5**	**6**	**7**	**8**
	(c) Maximum				No Limit		
	(ii) Hilly region and restricted locality						
	(a) Absolute minimum		Not less than 50	Not less than 50	Not less than 30	Not less than 20	Not less than 14
	(b) Ruling minimum		Not less than 80	Not less than 80	Not less than 50	Not less than 30	Not less than 20
	(c) Maximum				No Limits		

7 W**idths of carriageway (in metres)**

Sr. No.	Category of Road	Single Lane	Two lane without raised curbs	Two lane with raised curbs	Multi Lane (For each lane)
	1	2	3	4	5
	(i) National Highway & State Highway, Major State Highway	3.75	7.00	7.50	3.50
	(ii) M.D.R.	3.75	7.00	-	-
	(iii) O.D.R.	3.75	-	-	-
	(iv) V.R.	3.00	-	-	-
	8. **Widths of roadway (in metres)-**				
	(j) National Highway & State Highway, Major State Highway	12.00	12.00		
	(ii) M.D.R.	9.00	9.00		
	(iii) O.D.R.	7.50	9.00		
	(iv) V.R.	7.50	-		

Note:

For Multi - lane carriageways, the width of road way will be governed by factors such as central verge foot paths, cycle tracks etc., and width of road way is to be designed according to the requirements in each case.

In view of economy and traffic requirement road widths as 9 m.for M.D.R., and 7.5 m for O.D.R. V.R. should be taken and accordingly carriageway width minimum 3.75 m for single lane for S.H.,M.D.R., O.D.R. and 3.oo m for V.R. are recommended.

9- A Sight distance - The sight distance at every point of a highway should be as long as possible and should not be less than the absolute minimum sight distance given below -

Serial No.	Design speed in Km./hour No.	Minimum sight distance equal to the stoping sight distance in metres	
		Flat or rolling country	Hilly country
1	2	3	4
1	25	-	27.00
2	35	-	37.00
3	40	37.00	50.00
4	50	60.00	60.00
5	65	90.00	--
6	80	120.00	--

Above values are minimum whenever possible larges radius shall be used.

9-B Overtaking sight distance- The minimum overtaking sight distance for two lanes are given below :

Sr. No.	Design speed in Km./hour	Un-divided two lane cariageway (in metres)	Divided carriageway(at least two lanes wide carriageway in each direction)(in metres)
1	2	3	4
1	40	137.00	76.00
2	50	180.00	110.00
3	55	245.00	137.00
4	65	305.00	168.00
5	80	471.00	260.00

Note :

(I) Minimum sight distance shall be the distance along the road in which a driver whose eye is assumed to be 1.20 metres (4 ft.) above the road surface can see an object 10 cm (4 inch) high on the road.

(ii) The coefficient of friction between tyre and road surface is assumed 0.40

(iii) Perception and brake reaction time (in seconds) assumed for

50,65, & 80 kms/hr. speed is 2.5 2.75 and 3.00 seconds respectively.

(iv) Difference in speed of the overtaking and overtaken vehicles is assumed as 16 kms/hour.

10. Widening of carriageway on curves for all speeds

Radius of curves (mt)	Upto 60 mt.	01-100	101-10300	More than 300
Extra width in meters from outer edge of road	1.2	0.90	0.60	Nil

11. Bridge :

Roadway width at cross drainage structures

1) In plain and rolling terrain, the overall width on culverts measured from outside to outside of parapet walls should equal the normal roadway width given in sr. no.8.
2) In mountainous or steep terrain, the overall width on culverts measured from inside to inside of parapet walls shall be equal to the width given in sr.no.8
3) At bridges, the clear width of roadway between kerbs shall be as below

Clear width of various types of cross drainage works.

Sr. No.		N.H.	S.H.	M.D.R	O.D.R.	V.R.	Remarks
1	2	3	4	5	6	7	8
1.	Permis-sible interru-ption	Stoppage of Traffic 6 times in a year not exceeding shorter period				Upto 3days and 6 times in a year	As per Govt.of Maharastra PWD Chief Engineers order No.RS-1074-26431 P.I. dated 19/7/1974
			12 Hours at a time	12 Hours at a time	24 Hours at a time		

1	2	3	4	5	6	7	8
2.	Minimum clear width between wheels guards (In Metres) (a) Culverts - (i) Upto 1.524m liner # Waterway (ii)More than 1.524 m&upto 3.048 m (iii) More than 3.048 m& upto 6.096 m (b) Causeways and Submersible Bridges (c) Minor Bridges I.e. linear Water way more than 6 m and upto 30m (d) Major Bridges I.e. linear waterway more than 30 m	12 12 12 7.50 12 12	10* 10** 10** 7.50 7.50 7.50	7.50 7.50 7.50 7.50 7.50 7.50	7.50 7.50 7.50 7.50 4.25 -	4.25 4.25 4.25 7.50 4.25 -	In case ODR & VR each case will be delt with on it's own inevits. Generally Up to a Linear water ways of 1.37 mts, 3.70 mts, width may be provided.

Linear waterway refers to gross or total waterway provided between faces of Abutments or end piers e.g. a C.D. Works with 2 spans of 3.048 m. each will form a minor bridge as the total linear waterway including widths of pier is more than 6.00m.

* Outside to outside of parapet vide Government letter No.SSR.751-C dt.12th June 1952.

**The width of 10 m to be measured outside to outside of parapets subjected to a minimum of 9.1 44 m.clear width

Width of Carriage way on bridge specified by I.R.C. are as under

Single Lane	-	4.25 M
Two Lane	-	7.50 M
Three Lane	-	14.50 M
Four Lane	-	21.50 M

Note :- In case of V.R. & O.D.R. if the linear waterway is 1.37 m then the width of carriage way 3.70 M. However, the width of carriage way may be decided according to merit of V.R. & O.D.R.

Proposed standards for roads by the year 2001

N.H.Ways	S.H.Ways	M.D.Roads	O.D. Roads	**V.Roads**
1	2	3	4	5
2 Lane carriageway modern road surface fully bridged. (4 laning for traffic exceeding 10000 P.C.U.)	1. Single lane C.W. with modern surface fully bridged 2. 25% of existing length will have 2 lane pavements 3. 50% of existing length will have 5.5 m wide pavement. 4. 25% single length 5. 25% S.H.W. will have 5.50 m. width. 6. 7.5% new S.H. way will have single length pavement. 7. 4 laning for traffic exceeding 10,000 PCU.	Single lane B.T.Surface with High level/subm - ersible bridges (25% length have 5.5 width)	Single lane W.B.M. surface with cause ways Roads with traffic intensity exceeding 1000 tones per day shall be B.T. Roads serving population more than 5000 shall be B.T.	Single lane surface with culverts and causeways. Section with traffic intensity exceeding 1000 tones per days serving population exceeding 500 and road passing through village with population of 1000 and above.

NOTE :

Sections of O.D. Roads, and V. Roads in tribal areas carrying traffic exceeding 500 tone's per day or serving aggregate population of 2000 should be B.T.

2.3 The works of Roads and Bridges undertaken through Privatisation

[B.O.T.]

Maharashtra Government has prepared Road Development Plan for the period of 20 years and implement the project of road construction and improvement. After every 20 years, the new road development plan is prepared. It is very difficult to achieve the target of the road development plan due to paucity of funds. The development process does not motivated unless the industrial centers, business centers in Maharashtra are connected by the roads. Roads with sufficient transport capacity are to be built to connect district head quarters to capital cities and district head quarters to other district head quarter. In view of the above Maharashtra Government formed "Maharashtra State Road Development Corporation (MSRDC)" to implement the projects of improvement to state roads.

2.3.1 The works under privatisation are executed on the principle of build operate and transfer. The entrepreneur is constructing roads at his own cost. After completion of work, the entrepreneur is allowed to recover the total amount by the way of toll collection.

2.3.2 The following points are considered while proposing a project through privatisation.

1. The Government vide resolution No. Khakshesa/2002/Praka 279/Raste-9 dt. 9.1.2003 has given a guide line for the types of project which can be implemented through privatization , New construction of Roads and bridge, improvement of existing road for widening to 4 lane, improvement of 2 lane B.T. road for minimum 25 kms. length of road, Bypasses, Railway over bridges are the predominant type of works which can be taken up through privatization.
2. Schedule 'A' of the above Govt. Resolution includes the list of vehicles exempted from paying toll tax and norms of concession in toll tax.
3. The rate of toll tax are separate for the project cost up to 20 crore and project cost between 20 to 75 crores. The toll rates far the period up to 31st March 2052 are given in schedule B of the above circular. The toll tax policy is decided separately for the project costing more than 75 crore.
4. The Government has issued the guide lines for the preparation of feasibility report for the project to be undertaken through B.O.T. vide circular No. Khakshesa /2002/Praka/279(III)/Raste –9 dt. 9.1.2003.

Growth of Traffic Intensity to be considered every year.

- First 5 years - 5%
- 6 to 10 years - 4%
- After 10 years - 3%

Expenditure to be considered for Maintenance and Repairs

- For bridge work - 0.5%
- For Roads - 1.0%

  Special Repairs after every 7 years.
- For bridge work - 3 %
- For Road Renewal - 6% or as per actual estimation.

The entrepreneur will be bound to carry the renewal of surface before the increase in the roughness index of surface of road mentioned in the Chief Engineer Circular or the 7 years period, whichever period will be earlier.

Expenditure on Establishment and Toll Collection is presumed as per amount toll collection as mentioned below.

1)	Toll collection upto Rs.10 lakhs/month.	:	10% of monthly toll collection or minimum Rs.0.70 lakh/month.
2)	Toll Collection per month Rs. 10 lakh to Rs.25 lakh	:	7.5% of monthly toll collection or minimum of Rs.1.00 lakh / month.
3)	Toll Collection > 25 lakh /month	:	5% of monthly toll collection or minimum Rs.1.90 lakh/month collection.

Following depreciation in toll is presumed considering the exeption in the toll tax.

A) Toll station upto 5 kms. from the boundary of Municipal/Corporation- 25%

B) Toll station @ more than 5 kms. from the boundary of Corporation / Municipality.

Workout of upset value :-

For working out upset value for the preparation of toll collection proposal the upset value in worked out by considering the depreciation as above in the toll collection amount.

Construction Period :-

For the consideration of construction period of the project Government has issued guide line vide marathi circular No. Khakshesa-1089/praka 174/Road-9 dated 19-9-2000.

Sr. No.	Construction Cost	Construction Period
1.	Up to 1 crore	6 months.
2.	1 to 5 crore	1 year
3.	5 to 25 crore	18 month
4.	25 to 50 crore	2 year
5.	50 to 75 crore	30 months
6.	more than 75 crore	will be decided separately

ANNEXURE – A

Ref: Public Works Department G.R. No.Khashes-2002/C.R.279/(II)/Roads-9 dated 9 January 2003

Exemption from paying toll tax and norms of concession in toll tax

Year	Vehicle Type	Project Cost upto Rs.20 crores	Project Cost from Rs.20 crores to 75 crores.
	3 seater passanger Auto Rikshaw, Tracter with empty trolly (excluding scooter and motor cycle)	No Toll Tax	No Toll Tax
	LMV as per Motor Vehicle Act 1988 (59 of 1988)		
	A) Car, Jeep, Tata Sumo, Trax, Six seater passanger Auto rikshaw (excluding driver), comander and othe9r vehicles (upto 12 seater passanger excluding driver)	Toll Tax as per Appendix-B Category-1	Toll Tax as per Appendix-B Category-2
	9Truck, Bus	As above	As above
	Heavy vehicles such as Truck-Trailer, Multi axle vehicles (more than two axles as classified in Motor Vehicle Act 1988 and excluding vehicles in Sr. No. 3	As above	As above

Note :-

1. Toll rates for the projects costing more than Rs. 75 Crores and city Roads Development Integrated Units will be decided seperately.

2. Above toll rates are to be fixed assuming from 1st July 1998 as base year. Toll rates shall be increased 6^ per annum and once in 3 years on 1st April. The rates shall be rounded and converted upto nearest Rs. 5/- upto 2025 and Rs. 10/- after 2025. However yearly increase in rate shall be based on the toll rate of the respective year as per Appendix-B.

3. Following exemptions shall be given in toll rates –
   A) 10% concession shall be given for purchase of 50 coupons in advance of toll tax coupen booklet.
   B) 20% concession shall be given for purchase of 100 coupens in advance of toll tax coupen booklet.
   C) Return and daily pass facilities shall be given for frequent travelling vehicles. The toll rates shall be one and half times and two and half times respectively for those respective catagories of vehicles.
   D) The rates of monthly pass shall be 50 times of single journey rates.

4. following vehicles shall be exempted from Toll Taxes the vehicles from which
   i) Hon'ble MLA/MP of Maharashtra States are traevlling.
   ii) The vehicles of Central Government and State Government.
   iii) Police vehicles.
   iv) Vehicles owned by defence services.
   v) Vehicles of Post & Telegraph Department.
   vi) Ambulances carrying patients.
   vii) Ambulances carrying dead bodies.
   viii) Vehicles of Fire Brigade.

ANNEXURE – B

Ref: Public Works Department G.R. No.Khashes-2002/C.R.279/(II)/Roads-9 date 9 January 2003

Rate of Toll – Category – I (Project Cost upto Rs.20 Crores)

Year	Vehicle Type-2A Toll Rates		Vehicle Type-2B Toll Rates		Vehicle Type-3 Toll Rates		Vehicle Type-4 Toll Rates	
	Origi-nal Rate	Rate Roun-ded in Rs.	Origi-nal Rate	Rate Roun-ded in Rs.	Origi-nal Rate	Rate Roun-ded in Rs.	Original Rate	Rate Roun-ded in Rs.
1 July 1998 To 30 June 2001	8.00 8.48 8.99	8.00	12.00 12.72 13.48	12.00	25.00 26.50 28.09	25.00	40.00 42.40 44.94	40.00
1 July 2001 To 31 March 2004	9.53 10.10 10.71	10.00	14.29 15.15 16.06	15.00	29.78 31.56 33.46	30.00	47.64 50.50 53.53	50.00
1 APRIL 2004 To 31 March 2007	11.35 12.03 12.75	10.00	17.02 18.04 19.13	20.00	35.46 37.59 39.85	40.00	56.74 60.15 63.75	60.00
1 APRIL 2007 To 31 March 2010	13.52 14.33 15.19	15.00	20.27 21.49 22.78	20.00	42.24 44.77 47.46	45.00	67.58 71.63 75.13	70.00

Year	Vehicle Type-2A Toll Rates		Vehicle Type-2B Toll Rates		Vehicle Type-3 Toll Rates		Vehicle Type-4 Toll Rates	
	Original Rate	Rate Rounded in Rs.	Original Rate	Rate Rounded in Rs.	Original Rate	Rate Rounded in Rs.	Original Rate	Rate Rounded in Rs.
1 APRIL 2010 To 31 March 2013	16.10 17.06 18.09	15.00	24.15 25.60 27.13	25.00	50.30 53.32 56.52	55.00	80.49 85.32 90.44	85.00
1 APRIL 2013 To 31 March 2016	19.17 20.32 21.54	20.00	28.76 30.48 32.31	30.00	59.91 63.51 67.32	65.00	95.86 101.61 107.71	100.00
1 APRIL 2016 To 31 March 2019	22.83 24.20 25.66	25.00	34.15 36.31 38.49	35.00	71.36 75.64 80.18	75.00	114.17 121.02 128.29	120.00
1 APRIL 2019 To 31 March 2022	27.20 28.83 30.56	30.00	40.79 43.24 45.84	45.00	84.99 90.09 95.49	90.00	135.98 144.14 152.79	145.00

Year	Vehicle Type-2A Toll Rates		Vehicle Type-2B Toll Rates		Vehicle Type-3 Toll Rates		Vehicle Type-4 Toll Rates	
	Original Rate	Rate Rounded in Rs.	Original Rate	Rate Rounded in Rs.	Original Rate	Rate Rounded in Rs.	Original Rate	Rate Rounded in Rs.
1 APRIL 2022 To 31 March 2025	32.39 34.33 36.40	35.00	48.59 51.50 54.59	50.00	101.22 107.30 113.73	105.00	161.96 171.67 181.98	170.00
1 APRIL 2025 To 31 March2028	38.58 40.81 43.35	40.00	57.87 61.34 65.02	60.00	120.56 127.79 135.46	130.00	192.89 204.47 216.74	200.00
1 APRIL 2028 To 31 March2031	45.15 48.70 51.63	50.00	68.92 73.06 77.44	70.00	143.59 152.20 161.33	150.00	229.74 243.52 258.14	240.00
1 APRIL 2031 To 31 March2034	54.72 58.01 61.49	60.00	82.09 87.01 92.23	90.00	171.01 181.28 192.15	180.00	273.62 290.04 307.4	290.00

Year	Vehicle Type-2A Toll Rates		Vehicle Type-2B Toll Rates		Vehicle Type-3 Toll Rates		Vehicle Type-4 Toll Rates	
	Original Rate	Rate Rounded in Rs.	Original Rate	Rate Rounded in Rs.	Original Rate	Rate Rounded in Rs.	Original Rate	Rate Rounded in Rs.
1 APRIL 2034 To 31 March 2037	65.18 69.09 73.23	70.00	97.77 103.63 109.85	100.00	203.68 215.90 228.86	220.00	325.89 345.44 366.17	350.00
1 APRIL 2037 To 31 March 2040	77.63 82.29 87.22	80.00	116.44 123.43 130.83	120.0	242.59 257.14 272.57	260.00	388.14 411.43 436.11	410.00
1 APRIL 2040 To 31 March 2043	92.46 98.00 103.88	100.00	138.68 147.01 155.83	150.00	288.93 306.26 324.64	310.00	462.28 490.02 519.42	490.00
1 APRIL 2043 To 31 March 2046	110.12 116.72 123.73	120.00	165.18 175.09 185.51	180.00	344.12 264.76 386.65	370.00	550.58 583.62 618.42	580.00

Year	Vehicle Type-2A Toll Rates		Vehicle Type-2B Toll Rates		Vehicle Type-3 Toll Rates		Vehicle Type-4 Toll Rates	
	Original Rate	Rate Rounded in Rs.	Original Rate	Rate Rounded in Rs.	Original Rate	Rate Rounded in Rs.	Original Rate	Rate Rounded in Rs.
1 APRIL 2046 To 31 March 2049	131.15 139.02 147.36	140.00	196.73 208.53 221.04	210.00	409.85 434.44 460.50	430.00	655.75 695.10 736.81	700.00
1 APRIL 2049 To 31 March 2052	156.20 165.58 175.51	170.00	234.30 248.36 263.26	205.00	488.13 517.42 548.47	520.00	871.01 827.88 877.55	830.00

Rates of Toll –Category – 2 (Project Cost Rs.20 Crores to Rs.75 Crores)

Year	Vehicle Type-2A Toll Rates		Vehicle Type-2B Toll Rates		Vehicle Type-3 Toll Rates		Vehicle Type-4 Toll Rates	
	Origi-nal Rate	Rate Roun-ded in Rs.	Origi-nal Rate	Rate Roun-ded in Rs.	Origi-nal Rate	Rate Roun-ded in Rs.	Original Rate	Rate Roun-ded in Rs.
1 July 1998 To 30 June 2001	12.00 12.72 13.48	12.00	18.00 19.08 20.22	18.00	35.00 37.10 39.33	35.00	60.00 63.60 67.43	60.00
1 July 2001 To 31 March 2004	14.29 15.15 16.06	15.00	21.44 22.72 24.09	25.00	41.69 44.19 46.84	45.00	71.46 75.75 80.29	75.010
1 APRIL 2004 To 31 March 2007	17.02 18.04 19.13	20.00	25.53 27.07 28.69	25.00	49.65 52.63 55.78	55.00	85.11 90.22 95.63	90.00
1 APRIL 2007 To 31 March 2010	20.27 21.49 22.78	20.00	30.41 32.24 34.17	30.00	59.13 62.68 66.44	65.00	101.37 107.45 113.90	110.00

Year	Vehicle Type-2A Toll Rates		Vehicle Type-2B Toll Rates		Vehicle Type-3 Toll Rates		Vehicle Type-4 Toll Rates	
	Origi-nal Rate	Rate Roun-ded in Rs.	Origi-nal Rate	Rate Roun-ded in Rs.	Origi-nal Rate	Rate Roun-ded in Rs.	Original Rate	Rate Roun-ded in Rs.
1 APRIL 2010 To 31 March 2013	24.15 25.60 27.13	25.00	36.22 38.39 70.70	40.00	70.43 74.65 76.13	75.00	120.73 127.98 135.65	130.00
1 APRIL 2013 To 31 March 2016	28.76 30.48 32.31	30.00	43.14 45.73 48.47	45.00	83.38 88.91 94.25	90.00	143.79 152.42 161.57	155.00
1 APRIL 2016 To 31 March 2019	34.15 36.31 38.49	35.00	51.38 54.46 57.73	55.00	19.90 105.90 112.25	105.00	171.26 181.54 192.43	180.00
1 APRIL 2019 To 31 March 2022	40.79 43.24 45.84	45.00	61.19 64.86 68.76	65.00	118.25 126.12 133.61	125.00	203.97 216.21 229.18	215.00

Year	Vehicle Type-2A Toll Rates		Vehicle Type-2B Toll Rates		Vehicle Type-3 Toll Rates		Vehicle Type-4 Toll Rates	
	Origi-nal Rate	Rate Roun-ded in Rs.	Origi-nal Rate	Rate Roun-ded in Rs.	Origi-nal Rate	Rate Roun-ded in Rs.	Original Rate	Rate Roun-ded in Rs.
1 APRIL 2022 To 31 March 2025	48.51 51.50 54.59	50.00	72.88 77.25 81.89	75.00	141.71 150.22 152.23	150.00	242.94 257.51 272.96	260.00
1 APRIL 2025 To 31 March2028	57.87 61.34 65.02	60.00	86.80 92.01 97.53	90.00	168.78 178.91 189.64	180.00	289.34 306.70 325.10	310.00
1 APRIL 2028 To 31 March2031	68.92 73.06 77.44	70.00	103.38 109.51 116.16	110.00	201.02 213.08 225.87	210.00	344.61 365.21 387.20	370.00
1 APRIL 2031 To 31 March2034	82.09 87.01 92.23	90.00	123.13 130.52 138.35	130.00	239.42 253.79 269.01	250.00	410.44 435.06 461.17	440.00

Year	Vehicle Type-2A Toll Rates		Vehicle Type-2B Toll Rates		Vehicle Type-3 Toll Rates		Vehicle Type-4 Toll Rates	
	Origi-nal Rate	Rate Roun-ded in Rs.	Origi-nal Rate	Rate Roun-ded in Rs.	Origi-nal Rate	Rate Roun-ded in Rs.	Original Rate	Rate Roun-ded in Rs.
1 APRIL 2034 To 31 March 2037	97.77 103.63 109.85	100.00	146.65 155.45 164.78	160.00	285.15 302.26 320.40	300.00	488.84 518.17 549.26	520.00
1 APRIL 2037 To 31 March 2040	116.44 123.43 130.83	120.0	174.66 185.14 196.25	190.00	339.62 360.00 381.60	360.00	582.21 617.14 654.17	620.00
1 APRIL 2040 To 31 March 2043	138.68 147.01 155.83	150.00	208.03 220.51 233.74	220.00	404.50 428.77 454.49	430.00	693.42 735.03 779.13	740.00
1 APRIL 2043 To 31 March 2046	165.18 175.09 185.51	180.00	247.76 262.63 278.39	260.00	484.76 510.67 541.31	510.00	825.88 875.43 927.96	880.00

Year	Vehicle Type-2A Toll Rates		Vehicle Type-2B Toll Rates		Vehicle Type-3 Toll Rates		Vehicle Type-4 Toll Rates	
	Origi-nal Rate	Rate Roun-ded in Rs.	Origi-nal Rate	Rate Roun-ded in Rs.	Origi-nal Rate	Rate Roun-ded in Rs.	Original Rate	Rate Roun-ded in Rs.
1 APRIL 2046 To 31 March 2049	196.73 208.53 221.04	210.00	295.19 312.80 331.56	310.00	573.79 608.21 644.71	610.00	983.63 1042.65 1105.21	1040.00
1 APRIL 2049 To 31 March 2052	234.30 248.36 263.26	205.00	251.46 372.54 394.90	370.00	683.39 724.39 767.85	720.00	1171.52 1241.81 1316.32	1240.00

2.3.1 Other Norms

- The interest rate of SBI PLR rate should be considered while preparation of feasibility report of the project.
- Minimum 25% equity should be presumed for Debt : Equity ratio.
- Concession period corresponding to 16% IRR is generally considered in the feasibility report.

2.3.4 Procedure to be followed during the execution of the work through privatization.

1) Scope to be finalised for the pending project and obtain the general approval to same from Government.
2) After approval to the scope of the work, to prepare the feasibility report and prepare the detailed plans and estimates and obtain the sanction to the estimate from the competent authority.
3) Pre qualification of contractor- Tender Process – To submit the appropriate cost of the project and minimum concession period, to the Government for the approval of the same.
4) Executive Engineer to issue the work order after receipt of approval to tender from Government.

5) Planning the project and complete the same within the prescribed construction period.

6) Temporary completion certificate of the work – to be issued to the entrepreneur.

7) Toll collection proposed to be submitted to Government for approval.

8) After approval of proposal of toll collection then issue of toll collection notification at Govt. land.

9) Collection of toll by the entrepreneur for the balance period of concession period.

10) Project to be completed finally within 60 days from the date of start of toll collection and issue of completion report certificate by the Executive Engineer to the entrepreneur.

11) To maintain the project completely during the concession period.

12) Wherever the project does not become feasible due to the project cost and traffic intensity, Govt. tries to make the project feasible by making some provision of funds in the budget (Government's equity)

2.3.5 Under BOT projects of Roads & Buildings the delay occures from calling tender to giving award. For the purpose to avoid such delay and to gear up to projects a group headed by the Secretary (works) has been formed since 01-09-2006. The jurisdiction of this group is as under –

1. Planning and maintaining of projects at preliminary and tender stages.
2. Scruitiny of projects and obtain sanction from Govt.
3. Obtaining approval from planning and finance departments prior giving sanction to BOT projects.

After getting aproval frm the govt. It is the responsibility of the C.E . and othe field officer for tendering procedure and execution of the projects.

2.3.6 For the BOT projects costing more than Rs. 15 crores and are being executed through various corporations and Govt. undertakings should be Govt. approved from the steering committee of cabinate ministers.

2.4 Road Maintenance and Repairs

2.4.1 Public Work Departments Manual chapter No.3, Para No.13 classifies the works of P.W. Department in 2 categories.

1. Original Works –

Defined as purely new construction (Road and Building) or Addition or alteration to the existing structure, similarly complete repairs to newly purchased, acquired structure which was left previously but now necessary to use again. (P.W. Department manual Para 131 (1))

2. Maintenance and Repairs :

Definition includes the construction work for the maintenance and repairs of the building and roads in general use to keep the structure properly.

2.4.2 To maintain and Repair the existing roads to observe that there should not be any interruption to the traffic is the main purpose of the road repairs. To maintain the roads properly is the prime duty of the P.W. Department. To keep the traffic plying smooth on the National Highways, State Highways, Major District Roads, is the responsibility of the P.W. Department. Similarly Zilla Parishad is fully responsible for Other District Roads and Village Roads.

The expenditure for the maintenance and Repairs of National Highways is being borne by Central Government, whereas the State Government is allotting the funds required to maintain and repair of the State Highways Major District Roads, Other District Road, Village Road (PW Manual Para 131 (2))

Maintenance and Repairs of National Highways.

2.4.3 P.W. Department maintain and repair the National Highways in Maharashtra state. The length of National Highway in Maharashtra is @ 4000 kms. For the repairs of National Highways the funds are allotted by MORT & H New Delhi and accordingly repairs are being carried out by P.W. Department.

Major items involved in maintenance and repairs of National Highways include

A) Necessary pre mansoon activities to be carried out to avoid pot holes on the surface of road (Providing road site gutters, dressing site, shoulders, seal coat etc.)

B) To fill the pot holes by emulsion and metal during mansoon and by asphalt and metal after mansoon.

C) Removing bushes on the side shoulders and curves filling side shoulders by murum.

D) Painting of K.M. / 200 mt. / guard stone / pillers / sign boards etc.

E) Other necessary work as per requirement.

The funds allotment for maintenance and repairs of National Highways changes as per prevalent market rates, index etc.

2.4.4 MORT& H has issued revised guidelines for periodic renewals and surface quality improvements work on National Highways.

Accordingly stretches of National Highways are to be selected. Details are listed below.

1) Criteria for surface quality improvement works

i) Length of which existing layer is not incomplete or it not divided but has developed cracks and felt necessary to bring in level.

OR

ii) Two lane road carrying traffic of 1500 CVD or more and roughness index is more than 3500 mm per kilometer.

iii) Single lane road geometrically in order having traffic intensity more than 100 CVD and roughness index more than 3500mm/km.

OR

iv) Such length which was strengthened 5 years back but renewal not Done and due to increased traffic intensity indications of bad surface are there.

v) Such length should not be less than 10 kms.

2) Criteria for periodical renewals

i) Such length of the road where traffic intensity is between 450 to 1500 CVD and minor repairs are necessary and where need of renewal is justifiable.

ii) Such length of the road which has been strengthened in prvious programme and condition of surface in quite good comparatively and by renewal its surface will become durable and quality of surface will become fine and proposed renewal will last for minimum 3 years.

iii) The proposed renewal length be @ 10 km as far as possible or the length of integrated estimate for stretches of the length will be 10 kms.

Maintenance of repairs of Major State Highways, Major District Roads, Other District Roads and Village Roads

2.4.5 Detail instruction regarding maintenance and repairs are given in Govt. circular issued vide letter no.RMR/2002/praka-109/Road-1 Dated 4.6.2002

Group 'A' : Works required to be done for keeping the traffic is in order

- This programme is sanctioned at the level of concerned Superintending Engineer.
- The works of this programme are done thorough the department labours.
- If the works is required to be done through contractor, then Chief Engineers prior permission is necessary.
- Group 'A' includes the following items.
  1. Salary of labours
  2. Pot holes billing on road surface (Govt. PWD letter No. RMR/2002/ praka-109/Road-1 Dated 4.6.2002
  3. Construction of catch water drain and keeping in order
  4. Deepening of existing gutters.
  5. Construction of new gutters.
  6. Dressing side shoulders / camber to side shoulders.
  7. Reconstruction of railing and parapet
  8. Restoring the rain cuts of roads.

  Group 'B' : Improvements required for the standard of roads.

  The following works are intended in this group.
  1. Special repairs to road
  2. Asphalt renewal (renewal is generally done after every 4 years.)
  3. Road improvement and strengthening programme.
  4. Renewal by metalling.
  5. Widening of central coverage carriage way.

  Group 'C' : Special type of works

  Kokan, Marathwada, Vidharba Vikas Yojana (Limited to the scope sanction in the cabinet meeting)

This programme is sanction at Chief Engineers level with prior permission of Government.

In this group following works are included prominently.

(1) Improvement to accident prone spot.
(2) Geometrical Improvements as per road standards.
(3) Repairs / Strengthening week bridge / major bridge.
(4) WBM of murumy surface of road for making it all weather.
(5) Original work of CD works / Minor bridge road for making it all weather.
(6) Improvement / Widening of CD works

Group 'D' Miscellaneous work

The type of works not included in group A,B and C above will be included in this group.

2.4.6 The norms of maintenance and repairs of roads and bridges are given in the Govt. circular no. RMR/1089/CR-87/Road-1 dated 15.11.95. The norms are as given below. There norms are applicable to the roads under PWD and Zilla Parishad Department.

Sr.No.	Category of Road	Rate / Km.
1.	State Highways	Rs.25600 to 38200
2.	Major District Roads	Rs.21050 to 30100
3.	Other District Roads	Rs.20300 to 20650
4.	Village Road	Rs.19125 to 20300
5.	Non plan road	Rs.10450
6.	Minor bridge (Length < 30 m.)	Rs.100/Rmt.
7.	Major bridge (Length > 30 m.)	Rs.250/Rmt.

The rates mention above are based on DSR 1989-90. Demand for M&R of road is made considering the changes in DSR from time to time. The repairs works are done as per availability of the funds (Maharashtra Govt.PWD. circular No. RMR/1089/CR-87/Road-1 dated 15.11.95.)

Group 'E' Flood Damage Repairs-

In the exceptional circumstances when there is a need to execute the work of repairs to flood damage, the same are carried out as per availability of the funds at Government.

2.5 Inspection of Roads , Bridges & Buildings

2.5.1 Roads included Road Development plan are classified as National Highways , State Highway , Major District Roads, Other District Roads and Village Roads according to its importance, traffic intensity etc. In order to repair, maintain the surface, to propose new works Govt. Circular No. RMR-1082/(214) Desk R-1 dated 8/10/1984 has laid down inspection norms as under.

Sr. No.	Road	E.E.	D.E.	J.E.
1	N.H. & S.H.	Twice in a year	Six times in a year	Twelve times in a year
2	MDR & ODR	Once in a year	Thrice in a year	Six times in a year
3	V.R.	Once in a year	Twice in a year	Twice in a year

2.5.2 In order to provide amenities in tribal areas, roads shall be given special priority. For this Govt. circular No. Yojana-102 004/CR-455/Plan-1(2) dated 17/7/2004 laid down following.

Sr. No.	Authority	Frequency
1	Chief Engineer	Once in a year
2	Superintending Engineer	Twice in a year
3	Executive Engineer, P.W.D./ Z.P.	Quarterly
4	Deputy Engineer	Once in a Month
5	Junior Engineer	Twice in a month

2.5.3 In order to repair, maintain and to keep bridges and C.D. works in good condition Govt. circular No. MTS/3366/ NH-2 dated 31/3/1988 has laid down following norms of inspections.

A) Routine Inspection

Sr.No.	Structure	Authority	Frequency
1	Culvert /CD works	Junior Engineer Deputy Engineer	Twice in year Once in year
2	Minor bridge	Junior Engineer Deputy Engineer	Twice in year Twice in year
3	Major bridge	Deputy Engineer Executive Engineer	Twice in year Twice in year
4	Long bridge	Executive Engineer Superintending Engineer	Twice in year Once in year

B) Comprehensive inspection :

Sr. No.	Structure	Authority	Frequency
1	Minor bridge + Slab drain	E.E.	Once in 5 year
2	Major bridge with Moderate environment	S.E.	Once in 5 year
3	Major bridge with Severe environment	S.E.	Once in 3 year
4	Long bridge with Moderate environment	C.E.	Once in 5 year
5	Long bridge with Severe environment	C.E.	Once in 3 year

2.5.4 Note : classification based on Length of bridge

a) Less than 6 m Culvert, b) 6 m to 30 m- Minor bridge,
c) 30m to 250 m– Major bridge, d) More than 250 m – Long bridge.

2.5.5 To ensure quality, quantity and timely completion of works of Roads, bridges & buildings, Vigilance & Quality Control Circle organisation is set up by Govt. Circular No. Misc.2000/134/NH-2 dated 15/5/2002 has laid down norms of inspection in their jurisdiction. ‘

Sr. No.	Type of inspection	Norms
1	Routine Inspections	191
2	Surprise inspections	48
3	NMR Checking	24
4	Field lab testing	18
5	Test on material Collected during inspection	24
6	Stores Verification	4
7	Vehicles/ Machinery's inspection (log book)	10
8	Technical Audit	9
9	Technical Training's	10

2.5.6 Scheme wise norms of inspection by V.& Q.C. :

1	LDP works	10%
2	E.G.S works	5%
3	Repair Works	30%
4	Z.P. works	20%
5	Original works and other	35%

2.5.7 Works executed on Other district Roads Village Roads and other works of Zilla Parishad are to be inspected by Superintending Engineer vide Govt. circular No. 2PS-1094/CR-34/ MV-3 dated 31/10/1998

Sr. No.	Cost of works	Inspection norms
1	3-15 lakhs	5% works
2	Above 15 lakhs	100% works

2.5.8 Government Circular EST-1103/CR-172/EGS-3 dated 1/12/2003 has laid down norms for inspection of road works executed under Employment Guarantee scheme as under

Sr. No.	Authority of Inspection	No. of works/ year	Report to be submitted to
1	Superintending Engineer	12	Divisional Commissioner
2	Executive Engineer	25 and whenever checking is required	District Collector
3	Deputy Engineer/ Astt. Engineer Grade-1 / Sub Divisional Engineer	50 and whenever checking is required	Executive Engineer.

2.5.9 Buildings under repair, maintenance and construction with P.W. Department are to be inspected as per norms laid down in Govt. circular No. BDG-1090/CR-24/ Bldg. 2 dated 31/3/1990 .

Sr. No.	Authority	Frequency/ year	Type of Building
1	Junior Engineer	6	All
2	Deputy Engineer	2	All
3	Executive Engineer	1	Area > 500 sqm.
4	Superintending Engineer	1	Area> 5000 Sqm. Or 10 storey
5	Chief Engineer with Architect	1	Important buildings

2.6.District Schedule of Rates

2.6.1 Construction and maintenance Repairs of roads and buildings is done in P.W. Department. The funds are made available by Government for these works. For the construction of original work or maintenance and repairs of existing structures the plans and estimates are prepared and got sanctioned by competent authority. For preparation of the estimate, survey is taken, the scope is decided and accordingly items and cost is worked out. For working out estimated cost it is necessary to fix the rate of each item. The DSR Committee is form for Nashik Region. The committee comprises of all the Superintending Engineer in the region and all the Executive Engineer at district head quarters. Zonal Superintending Engineer is the Chairman of this committee and other are members.

2.6.2 DSR is prepared every year. Generally after the end of financial year the meeting of the committee is held for preparation of DSR. It is completed in 3 months and the implementation of DSR starts from 1st of July every year. If there is delay in the finalization of DSR, then extension to last year's DSR is granted. In the DSR generally the rates of following items are finalized.

1) The completed rate of items as per details and as per category of work.
2) Labour rate and material rate of the completed item.
3) Independent labour rates.
4) Transportation rates per km. for construction material.
5) Rates of hire of machinery.

2.6.3 Following activity is done while preparing DSR.

1) The market rates of construction material are gathered by the Executive Engineer of district head quarter.
2) The trend of the bidder for the tenders in the last year is observed.
3) Transportation rates are finalised after collecting the market rates of petrol, Diesel and transportation of construction material.
4) The rates of items are finalised considering the market rates and the trend of the bidders. In the last year tenders.
5) If a new item is to be included in the DSR, then detail discussion regarding rate analysis is held in the meting and then rate is finalised.
6) The sufficient no. of copies of DSR are made available in P.W. Department , as the same DSR is useful for the works undertaken by Municipality, Corporation and Private civil engineers.

2.7 Employment Guarantee Scheme

2.7.1 The roads included in 1981-2001 road development plan can be taken up for construction through Employment Guarantee Scheme. Divisional Commissioner has got powers to sanction the Non-Plan road through Employment Guarantee Scheme.

2.7.2 Road improvement and widening works as per prevailing norms can be taken through Employment Guarantee Scheme as per Employment Guarantee Scheme compendium.

2.7.3 Facilities to labourers are provided as per prevailing Employment Guarantee Scheme norms and rules.

2.8 Local Sector Development Programme (MLA/MLC)

A programme based on local demand is implemented by the Government in the State since 1984-85. The Government has a policy to include the minor works based minimum need of Local public which could not be find place in district due to paucity of funds.

2.8.1 The State Government places the funds of Rs.80 lakhs to every MLA / MLC for their constituency every year. However the MLC can utilise the funds for works in any district in the state.

2.8.2 A committee has been formed for grant of these works vide (marathi) Govt. circular No.LDP-1099/CR-7/Desk-1445 dated 16.6.1999 as detail below.

1. Guardian Minister of District	:	Chairman
2. A) MLA's in the district	:	Member
B) MLC in the district	:	Member
3. Chairman of the Zilla Parishad	:	Member
4. Collector of District	:	Member
5. Chief Executive Officer, Zilla Parishad	:	Member
6. District Planning Officer	:	Member Secretary

2.8.3 The Collector gets the estimates for the works sanctioned by the committee under this programme. The executive agency after technical scrutiny submit the detailed plans and estimates for administrative approval to the Collector and District Planning Officer. The District Planning Officer after his scrutiny and availability of funds submits them to the collector for according Administrative Approval.

The Collector accords administrative approval to the estimates .

2.8.4 The appendix "A" appended with the Government (marathi) circular No. LDP-2004/CR-27/Desk-1445 dated 19.4.2004 shows the works eligible for consideration in the programme out the works suggested by the member of the assembly.

The list of such works to be tackled by P.W.D. is as below.

Appendix "A"

Roads : 1) Road works costing upto Rs.10 lakhs.

i) Small Roads (Metaling)
ii) Missing links
iii) Small CD Works/Bridges
iv) Metaling and black topping roads upto to 3 kms. lengths.
v) Hume pipe culverts.

vi) Small foot bridges.
vii) Nalla training works.
viii) Small dhapa drains on roads.
ix) Hard passage on small nallas.
x) Foot bridge
xi) Drainage works

2) Concrete Roads
3) Safety wall in ghat portion
1) Earth work of new roads, widening of roads and improvements to grades of roads.
2) Hot mix works of roads

All the above works are to be executed by PWD.

Buildings :-

1) Social meeting Hall costing upto Rs.10.00 lakhs.
2) Repairs to samaj mandir, community hall upto Rs.10.00 lakhs.
3) Works of samaj mandir and community hall Rs.10.00 lakhs.

The works limited upto the cost as above are to be executed as per the type design by the PWD and Zilla Parishad.

Moreover the works like primary school rooms, health centers, Gym Khanas, Grave Yard, Chouki (Chowdi), Gram Sachivalaya, Public Library etc. are also executed by PWD or Zilla Parishad under Local Development Programm.

2.8.5 Hilly Area Development Plan :-

Special funds are placed by the Government for hilly area specified by the Government as that the local development programme.

2.9 Local Sector Development programme (M.P.Fund)

2.9.1 Public Works Department is executing works in parliamentary constituency recommended by concern member. A member can recommend works costing upto Rs.200 lakh in each year. Maximum cost of work is limited to Rs.25.00 lakh.

Ministry of statistics and programme executing, Government of India has issued

guideline and list of works permissible. Works are executed as per rule and regulation issued by Government.

2.9.2 LIST OF WORKS THAT CAN BE TAKEN UP UNDER MP's Funds.

1. Construction of buildings for schools, hostels, libraries & other buildings of educational institutions belonging to Government or local bodies. Such buildings belonging to aided institutions & unaided but recognised institutions can also be constructed provided, however that the institution be in existence for not less than two years.
2. Construction of tube-wells & water tanks for providing water to the people in village, towns or cities, or execution of other works, which may help in this respect. Water tankers can also be purchased for providing drinking water.
3. Construction of roads including part roads, approach roads, link roads etc. in villages and towns and cities. Very selectively Kutcha roads can also be constructed where the MP concerned & the District Head agree to meet the locally felt need.
4. Construction of culverts/bridges on the roads of above description & of open cut or tube wells.
5. Construction of common shelters for the old or handicapped.
6. Construction of buildings for local bodies for recognised District of State Sports Associations & for cultural & sports activities or for hospitals. Provision of multi-gym facilities in gymnastic centres, sports associations, physical education training institutions etc. is also permissible.
7. Special forestry, farm forestry, horticulture, pastures parks & gardens in Government & community lands or other surrendered lands.
8. Desilting of ponds in villages, towns & cities.
9. Construction of public irrigation & public drianage facilities.
10. Construction of common Gobar gas plants, non-conventional energy systems/devices for community use & related activities.

11. Construction of irrigation embankments, or lift irrigation or water table recharging facilities.
12. Construction of public libraries & reading rooms.
13. Construction of creches & Anganwadis.
14. Construction of public health care buildings, including family welfare sub-centres together with the ANM residential quarters. Such buildings belonging to aided institutions also can be constructed.
15. Construction of crematoriums & structures on burials/cremation grounds.
16. Construction of public toilets & bathrooms.
17. Construction of drains & gutters.
18. Construction of footpaths, pathways & footbridges.
19. Water, pathway, public toilets etc. in slum areas of cities, town & villages & in SC/ST babitations, provision of common work-sheds in slums.
20. Construction of residential schools in tribal areas.
21. Construction of bus-sheds/stops for public transport passengers.
22. Construction of veterinary aid centres, artificial insemination centres & breeding centres.
23. Procurement of hospital equipment like X-Ray machines, ambulances for Government Hospital & setting up of mobile dispensaries in rural areas by Government Panchayati Institutions. Ambulances can be provided to reputed service organizations like Red Cross, Ramakrishna Mission etc.
24. Electronic Projects :
    i) Computer in education project of High School/College
    ii) Information footpath
    iii) Ham Club in high schools
    iv) Citizen band radio
    v) Bibliographic data-base projects

25. Construction of Level Crossing at unmanned Railway crossing.
26. Purchase of Audio-Visual Aids of educational nature for Government, Government-aided & also unaided but Government recognized educational institutions provided there is proper place & proper provision for safe custody of these aids.
27. Purchase of Night Soil Disposal System for local bodies.
28. Purchase of motor boats for flood & cyclone affected areas.
29. "Works relating to animal care / welfare like construction of buildings/shelters, provision of ambulances, medical equipment & development of infrastructure facilities like provision of drinking water drainage etc."

2.10 **Speed Breakers**

2.10.1 National Highways :-

Norms for speed breakers on National Highways are as below.

1) No speed breaker is allowed on national highways.
2) However, at places where there is need to regulate the speed of traffic, properly designed rumblestrips as prescribed in guidelines may be permitted.

   Guidelines for rumblestrips are as under :-

   A) The rumble strips be 30 cm. in width, 25 mm thick placed at 1.00 m. distance and 3 in number at a place.
   B) The length of rumble strips be so that they should be end to end of the side shoulder.
   C) There should be indicator boards like 1)Rumble strips ahead and 2) Rumble strips here at a specific distance from rumble strips as prescribed in IRC 99:1988.

2.10.2 State highways and below category of roads

As per Government of Maharashtra circular dated 7th may 2005. The speed breaker which are not as per the type design prescribed in IRC 99:1988 are to be removed and only the speed breakers sanctioned by "Speed breaker committee" at district level are to be allowed.

A) To Install new speed breakers :-

The speed breaker are allowed after recommendation of the district level committee of the Collector, District Superintendent of Police and the concern Executive Engineer of P.W.as detail below.

i) For speed breaker on National and State Highways : Chief Engineer
ii) Speed breakers on Major District Roads :Superintending Engineer
iii) Other District Roads and Village Road: Speed breaker committee of the district


B) Existing Speed breakers :

The Executive Engineer should take a review of all the existing speed breaker / rumbling strips and remove the unnecessary. The essential speed breakers / rumbling strips can be retained as detailed below.


i) At the Junction of Roads the speed breakers / rumbling strips be provided on the secondary roads (In lower category of roads) and the road marking strips be provided with necessary informatory sign boards at a specific distance from the speed breakers / rumbling strips.

ii) Speed breaker should be as type drawing number 1 of IRC –99:1988. The width of which is 3.70 M. (rounded with 17 m.) 0.10 M. high and should be end to end of side shoulders in length.

iii) The rumbling strips be 3 in number at a place which are at 1.0 M. from each other, 30 cm. and 25 mm thick only and of such length that they should be end to end of the site width with necessary informatory sign board at specific distance as per IRC 99-1988.




(a) LONGITUDINAL SECTION

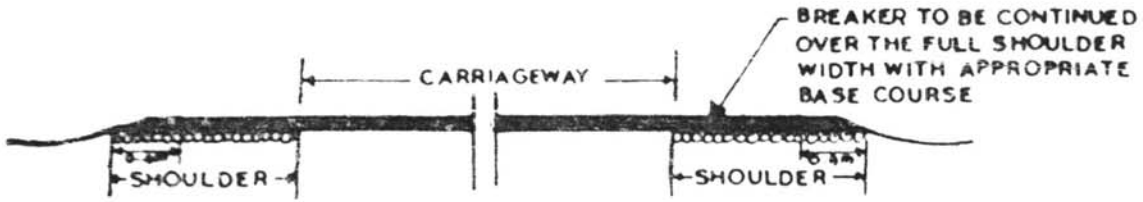

(b) TRANSVERSE SECTION

Fig. 1. Recommended specification for rounded hump type of speed breaker for general traffic at preferred crossing speed 25 km/h

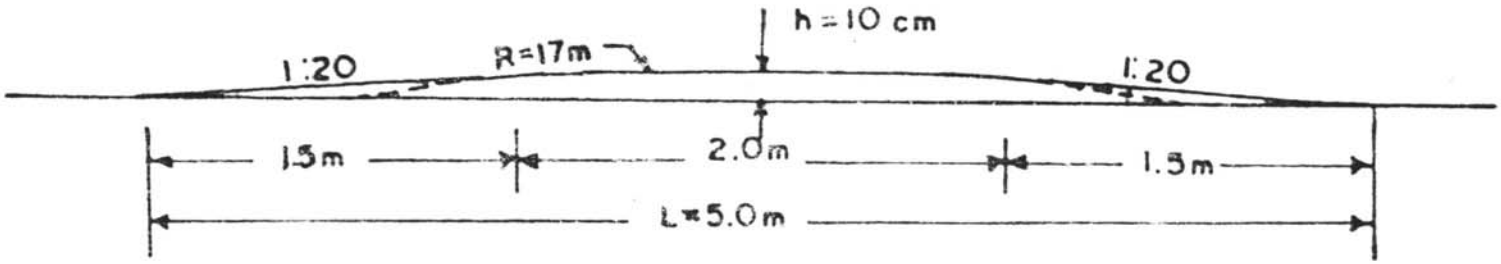

(a) LONGITUDINAL SECTION
(b) TRANSVERSE SECTION IS SAME AS GIVEN IN FIG. 1

Fig. 2. Recommended specification for hump type of speed breaker for heavy truck and bus traffic at preferred crossing speed 25 km/h

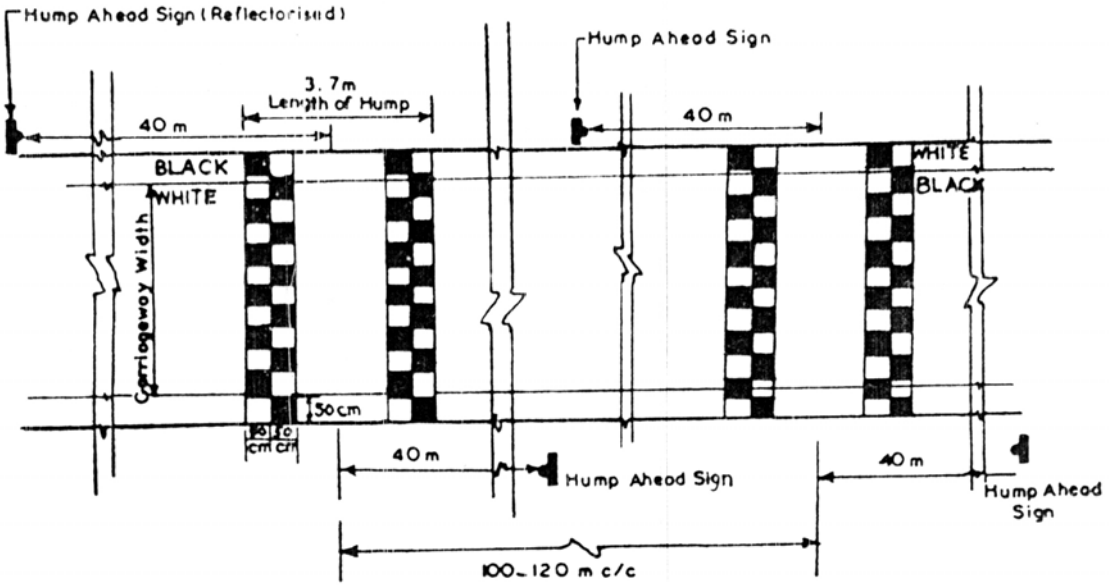


Fig. 3. Recommended placement of hump/humps in mid-block section, hump marking in chequered pattern and sign board locations

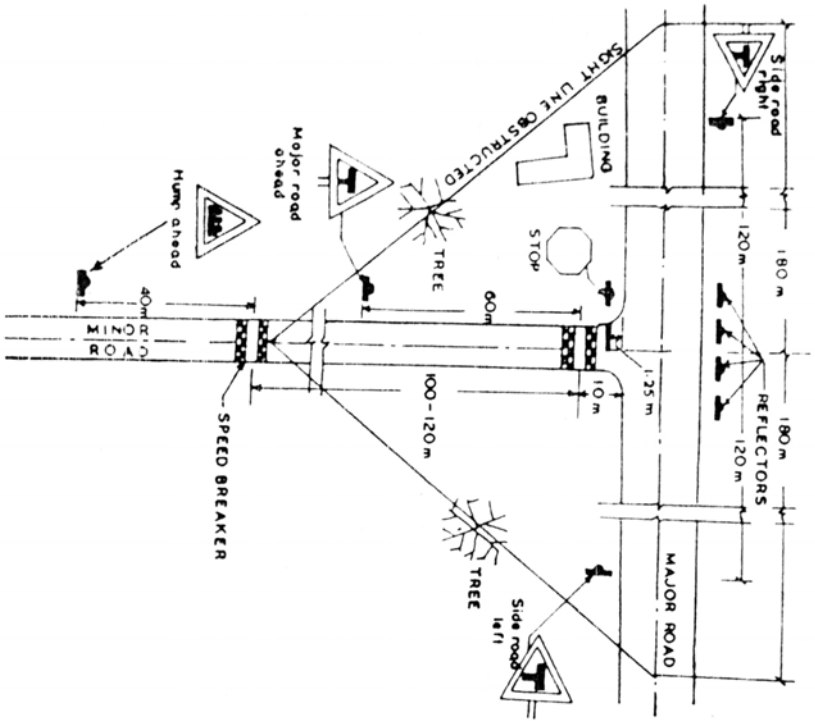


Fig. 4. Speed breakers at T-intersection or railway crossing

IRC : 99-1988


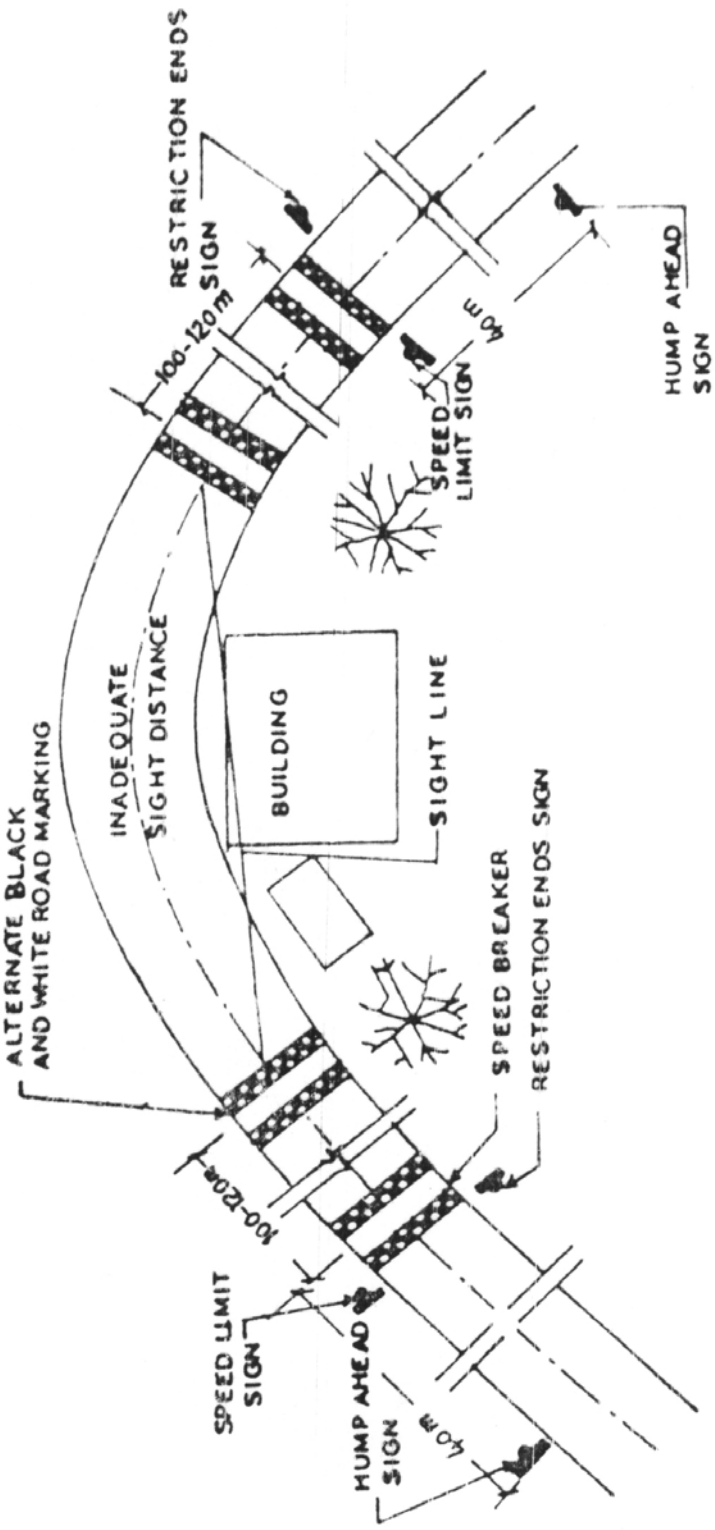


Fig. 5. Plan of speed breakers on approach to a sharp curve

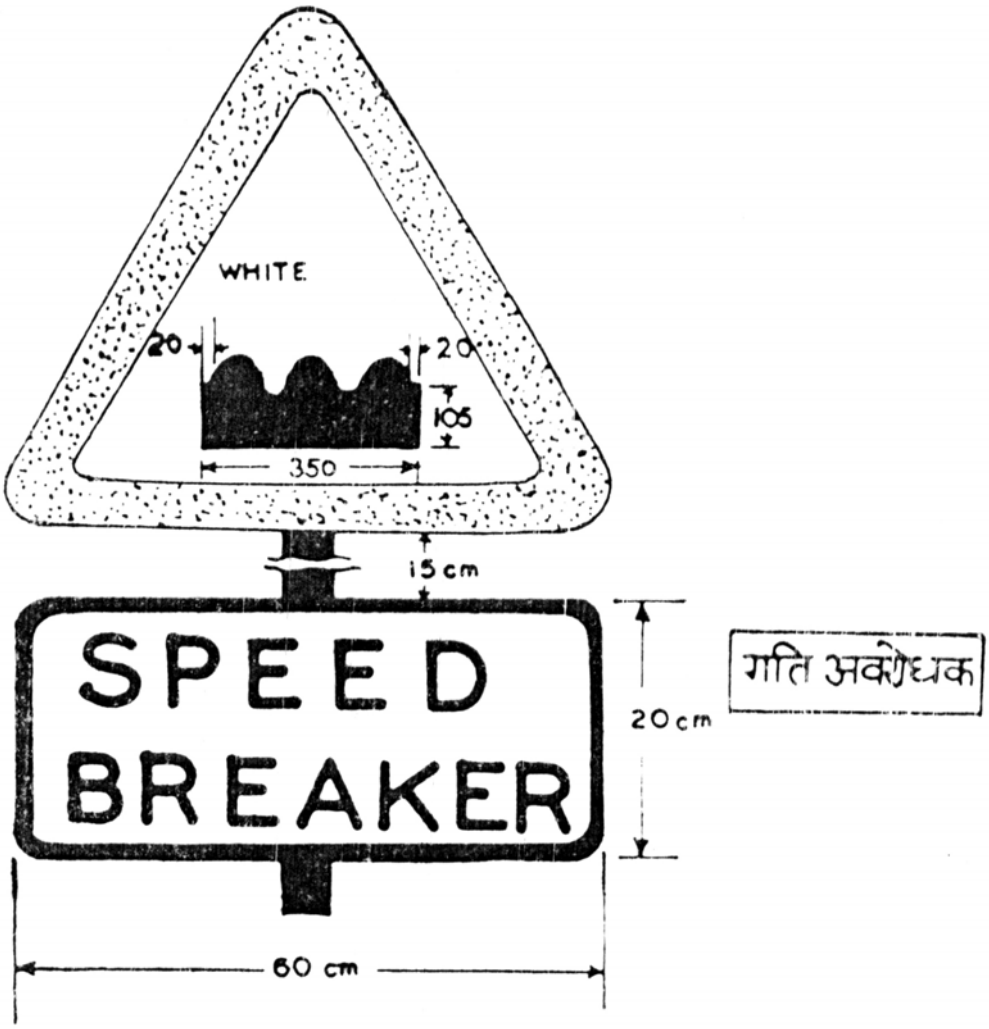

SIGN DETAILS :

Lateral Placement Left

0.60 m on kerbed roads

2.3 m on unkerbed roads

Mounting Height

2.0 m on kerbed roads

1.5 m on unkerbed roads

Use reflective paint or strip

Size of △ 60 cm or 90 cm (standard)

Red strip width 4.5 cm or 7.0 cm

Post (8 cm × 8 cm × 0.8 cm)

T—Iron to be painted white and black in alternate 25 cm bands

Fig. 6. Recommended hump warning sign with definition plate

2.11 Ribbon Development Rules

2.11.1 Developments along road sides creates hurdles to safe traffic. To control such developments, ribbon development rules are framed. Building line and control line are defined in Mumbai Highway Act 1955, Maharashtra Land Revenue, Rules 1969,MORT & H Delhi circulars dated 13/1/1977 and standard Building and development rules for Municipal Council A/B/C.

2.11.2 Building line and control line regulations are to be accounted while issuing no objection certificate. Norms for building Line and Control are as follows. Definitions of building line and control line as given in PWD Hand books (Part I, 1963 edition) are as follows.

1) **Building Line :**

   Imaginary line beyond which construction activities are allowed.

2) **Control Line :**

   Imaginary line beyond which commercial buildings like factories, godown, cinema hall, etc. are constructed.

3) **Urban and Non Urban Area :**

   Urban area means area within jurisdiction of Municipal Corporation or Municipal council declared by Government. Area excluding above is non urban area.

4) **Hilly area :**

   Definition of Hilly Area is given in Govt. resolution No.डोविका/1089/प्र-66/Yojna/19/Dt.23.11.1990, Appendix 3.

5) **Industrial Zone :**

   The zone declared as industrial zone by Government of Maharashtra's Gazzet.

6) **Centre of Road :**

   Centre of road is a centre of road land.

2.11.3 Following are norms for Control Line and Building Line

Sr. No	Category of Road	Building Line		Control Line	
		Urban and Industrial area	Non Urban Area	Urban and Industrial area	Non Urban Area
1.	Express way	60m from road centre or 15m from boundary whichever is more	60m from road centre or 15m from boundary whichever is more	60m from road centre or 15m from boundary whichever is more	60m from road centre or 15m from boundary whichever is more
2	National Highway	3 to 6 m from road boundary	40 m from road centres	37.0 m from road centres	75.0 m from centres
3.	State highway and major state highway	20 m from road centre or 4.5 m from road boundary whichever is more.	40 m from road centres	37.0 m from road centres	50 mts from road centres
4.	Major District Road	15m from road centre or 4.5m from boundary whichever is more	30.0 m from road centres	37.0 m from road centres	47.0 m from road centres
5.	Other District Road	12m from road centre or 4.5 m from boundary whichever is more	15.0 m from road centres	18.0 m from road centres	30 m from road centres

Sr. No	Category of Road	Building Line		Control Line	
		Urban and Industrial area	Non Urban Area	Urban and Industrial area	Non Urban Area
6.	Village Road	10.0 m from road centre or 3.0 m from boundary whichever is more	12.0 m from road centres	14.0 m from road centres	25.0 m from road centres

National Highway, Major State Highway, State Highways passing through cities or industrial areas, byepass road is constructed. For byepass building line is taken as 40m from centre and control line 75m from centre.

Reference :

1. Government PWD Gr.No.RBD-1081/871/Road –7 dated 9/3/2001
2. Government PWD letter No.RBD-1001/72/Road-7 dated 21/9/2001
3. PWD corrigendum no.RBD. 1001/72/Road-7 dated 7/1/2002
4. Planning Department Gr.No.Dovika –1089/CR 66/Yojana 19 dated 22/11/1990
5. PWD letter No.RBD/2004/CR 26/Road 7 dated 7/7/2005
6. Urban Development dept letter No. Misc/2002/AN 298/cr No.258/03/Nav-12 dated 10/6/2004.

2.12 Traffic Census

2.12.1 National Highway :

The traffic census was being done by P.W.Department on National Highway as per instructions given in IRC –9-1972. Now the traffic counts station is taken as per MORT & H Delhi's ltr.No.RW/NH/33044 /39/2000 – S&R(R) dated 13.7.2005 and as per guidelines prescribed and issued by Government MORT&H circular no. NH-26011/199/PL/dated 31.12.99.

The traffic census is taken twice in the year i.e. in month May and December and its report is submitted to State Government as well as to Central Government.

2.12.2 State Highways and other roads

According to the guidelines issued in the Maharashtra Govt. P.W.D. letter No. वागअ/1094/CR 62/नि.2/(सा.) Dated 17.11.94 क्र.वागअ-1215/Dec.९५/(85)/(सां.) dated 10.1.1996 traffic census is to be taken in the month of December for even year and in the month of May for the odd year at predetermined count post and will start on 3rd Monday of that month at 6 AM and will be done round the clock for 7 days and will stop on the 4th Monday at 6.00 A.M.

2.13 ACCESS PERMISSION

2.13.1 National Highways :-

Norms and procedure regarding Access to Fuel Stations, Service Stations and Rest Areas along National Highways are laid down in Government of India, Ministry of Road Transport and Highways, New Delhi's Circular No.RW/NH-33023/19/99-DO-III dated 17.10.2005 and clarification on some norms are made vide letter No. RW/NH-33044/5/204 S&R(R) .

The list of documents tobe submitted with the proposal, check list and norms are as detailed below.

A) List of documents to be submitted for obtaining approval for installation of new Fuel Stations along National Highways.

[Enclosure to Ministry of Road Transport and Highways letter no. New Delhi's Circular No.RW/NH-33023/19/99-DO-III dated 25/09/2003]

List of documents to be submitted for obtaining approval for installation of new Fuel Stations along National Highways as per above circular.

1) Signed copy of license deed. The draft is at Annex III.
2) Certified copy of location plan of the Fuel Station along the National Highway showing detail of Right of Way (ROW) of National Highway, access roads to private properties, existing public roads and other developments falling within a reach of 1.5 km. In each side of the Fuel Station and carriageway.
3) Certified copy of plan of proposed Fuel Station showing details of deceleration, acceleration lanes, service road(if provided), buffer strip, fuel pump, office, kiosk, lubritorium, air and water supply, drainage details, signs and marketing conforming to applicable figures enclosed with these Norms.
4) Certified copy of sectional view showing elevation of Fuel Station with respect to National Highway and slopes to be provided for adequate drainage and preventing water logging on National Highway.
5) Drainage plan of the Fuel Station.
6) Details of the material for pavement composition for deceleration lane, service road and acceleration lane.
7) Inspection report of the officer inspecting the site of proposal Fuel Station and certificate that all standard conditions have been specified.
8) Detailed explanation for reasons for recommending the exemption from stipulated norms (if required).

9) Undertaking from the oil company/owner that the oil company/owner would pay necessary fee for the use of the National Highway land whenever the fee is asked by the Highway Authorities in future.

10) Undertaking from Oil Company that necessary alteration including complete removal/shifting of the approach roads at its own cost if so required by Ministry, for the development of National Highway or in the interest of safety in this section.

11) Undertaking from Oil Company that they shall take all the action as prescribed in Appendix I to ensure conformity of these Norms.

B) <u>CHECKLIST</u>

Chek list for obtaining approval for installation of new Fuel Stations along National Highways.

1. General Information : _____

1.1 National Highway State : _____

1.2 State :

1.3 Location : _____

1.3.1 (Chainage in Km) : _____

1.3.2 [Side of NH (Left or right side of NH towards increasing chainage/ km direction)] : _____

1.4 Name of Highway Authority: (NHAI/BRO) _____

1.1 Executive Engineer (or Equivalent) address : _____

1.2 Name of Oil Company (as applicable) : _____

1.7 Name and address of Owner of Fuel Station :

: _____

_____

C) Stipulated Norms for Fuel Outlet

Sr. No.	Item	Mes-ure - ment at site	MORTH Norms	Whether complying with MORTH Norms**
1	Distance from intersection			
	1.1 Non Urban (Rural) Stretch			
	1.1.1 Plain and Rolling Terrain			
	(i) Intersection with NHs/SHs/MDRs.		1000 mt	Yes/No
	(ii) Intersection with Rural Roads with carriageway width of 3.5m or more		300 mt	Yes/No
	(iii) Intersection with Rural Roads and other earth tracks with carriageway width less than 3.5 m		100 mt	Yes/No
	1.1.2 Hilly / Mountain Terrain			
	(i) Intersection with NHs/SHs/MDRs		300 mt	Yes/No
	(ii) Intersection with all other roads and tracks		100 mt	Yes/No
	1.2 Urban Stretches			
	1.2.1 Plain Rolling Terrain			
	(a) Urban Area with Population of more than 20,000 and less than one lakh.			
	(i) Intersection with any category of roads of		300 mt	Yes/No

	carriageway width of 3.5m and above (ii) Intersection with roads of carriageway width of less than 3.5 m. (b) Urban Area with population of one lakh and above (i) Interaction with any category of road (irrespective of carriageway width) 1.22 Hilly and Mountainous Terrain (ii) Interaction with any category of road (irrespective of carriageway width)		300 mt 100 mt 100 mt	
2	Is it a part of Rest Area complex? Distance from nearest Fuel Station (a) Plain and rolling terrain in non-urban areas (i) Undivided carriageway (ii) Divided carriageway (b) Hilly terrain and urban stretches Distance and check barrier /Toll plaza		 Min 300 mt Min 1000 mt Min 300 mt Minimum 100 m	Yes/No Yes/No Yes/No Yes/No Yes/No

3	Provision of 7.0m /5.5m wide service/connecting road		Necessary at clustering of Fuel Station	Yes/No
4	Gradient of Highway Section		Maximum 5%	Yes/No
5	Slope of Fuel Station Premises/Services Area for drainage purpose		Maximum 2%	Yes/No
6	Width of Frontage		Maximum 35m/20m	Yes/No
7	Length of Buffer Strip		Maximum 12m	Yes/No
8	Width of Buffer Strip extending inside Row		Maximum 3m	Yes/No
9	Is there only one structure of approved standard identification sign on pole with existing on buffer strip?		No structure or hoarding except approved standard identification sign on pole is allowed on buffer strip.	Yes/No
10	Height of kerb for buffer strip		Maximum 275m	Yes/No
11	Is the space from outer edge of buffer strip to the edge of road turfed and raised with provision of 275 mm kerbs, with not other structure?		No structure hoarding or packing space is allowed in the space in front of buffer strip.	Yes/No
12	Radius of Turning Curve		Minimum 13m	Yes/No

13	Radius of Non turning curve		Minimum 1.5m Maximum 3m	Yes/No
14	Minimum downward slope of access roads towards the fuel station		Minimum 2%	Yes/No
15	Difference in elevation from edge of road and edge of buffer strip		Minimum 15 cm	Yes/No
16	Provision of Culvert, designed for drainage according to IRC-SP-13		Minimum 1m dia(Pipe culvert) Minimum 1m span (Slab culvert)	Yes/No
17	Provision of proper drainage arrangement for fuel station premise		Drawing showing drainage arrangement as per satisfaction of highway authorities to be submitted	Yes/No
18	Provision of adequate signs and markings as per drawings.		Minimum requirement as shown in the drawing	Yes/No

If norms are not satisfied, detailed explanation needs to be given, otherwise the application will not be considered. In all cases supporting documents as per Annex.I have to be submitted, otherwise the case will be summarily rejected.

2.13.2 STATE HIGHWAYS AND BELOW CATEGORY ROADS :

Norms and procedure for National Highways is also followed for State Highways and below category roads. The access permission is granted by state government .

The norms are as detailed below.

1) The applicant should apply to the Executive Engineer P.W./Z.P. (P.W.) Division concerned.

2) List of documents to be submitted with the proposal.

- Current copy of 7/12 of the land for which access permission is required.
- Measurement plan for Taluka Inspector of Land Records concerned for the land in question.
- The Development plan or part their of the City / Village of which the land in questions is a part.
- Taluka or District Map showing the location of proposed petrol pump.
- The certified copy of the Development Plan of the land in which the petrol pump is to be erected showing all the developments proposed, land boundary of Govt. road, building line, control line along with distances from the centre line of the road.
- Cross Section and L-Section of the land proposed for development showing levels on crown of the carriageway, side widths and the land in which the petrol pump is to be erected.
- Drainage Plan of the land for which access permission is required.
- Location Plan showing all the junctions of roads, existing structures and petrol pumps, Hotel Dhabas, Industries, Private properties along with the number and category of roads as per RDP their width and type of carriageway on either side of road and land for which access permission is required upto a distance of 1.5 kms from the proposed petrol pump.
- The Non-Agriculture order of the concerned Collector for commercial concern (i.e. for erection of petrol pump etc.)
- The certified copy of Power of Attorney if the applicant is a representative of a company of Institution.
- Authority letter from the Government of India’s Ministry of Petroleum and Natural Gas, Delhi regarding authorisation of Marketing Rights of petroleum Products to the concerned.
- Undertaking covering all the points below on a revenue stamp of minimum Rs.20/-.

- That the Oil Company/Owner that necessary alteration including complete removal/shifting of the approach roads at its own cost if so required by the Government for the development of road or in the interest of public safety and no compensation will be claimed and will not be allowed to file suit in the court in this regards.

i) Affidavit assuring that the oil Company/Owner will pay the rent fixed by the Government every year in advance.

ii) That all the rules and conditions laid by the Government inforce will be binding upon the Oil Company/Owner.

iii) That the Oil Company/Owner will construct the approach road along with catchwater drains and culverts at own cost to the entire satisfaction of the Executive Engineers concerned.

iv) The Oil Company / Owner will pay one time tax /fee Rs.1.00 lacks or as suggested by the Government in case of National Highways.

v) That the Oil Company/Owner shall take all the action in conformity of the norms and conditions as prescribed in the Appendix I of Govt. of Indias Circular dated 17.10.2003.

- That the applicant will submit a Bank Guarantee in Original for Rs.5.00 lacks for minimum periods of 1 year, in the name of Executive Engineers concerned.
- The applicant will have to executed a bond on a Revenue Stamp of Rs.100/- as prescribed in Appendix III appended with the Govt. of India, MORT & H Delhi's Circular dated 17.10.2003.
- The Executive Engineer concerned will have to submit an Inspection Report after inspecting of the site of proposed Fuel Station and a certificate that all standard condition have been specified.
- Detailed explanation for reasons for recommending the exemption from stipulated norms (if required) by the concerned.
- The check list duly completed in all respects as per Appendix II as appended with Govt. of India's circular dated 17.10.2003 along with name and dated signature of the applicant as well the officials of the P.W.D.

2.14 Pipeline Crossing

Commercial activities like Factories, Industrial complex, Residential complex are developing along the road side to a large scale. The proposal for crossing or laying the water supply/drainage pipe lines, telephone cable, electric cables are to dealt with by this Department. After scrutinizing if the proposal is found suitable the activity of granting permission to the applicant is performed by the Executive Engineer concerned of P.W.D. /Z.P. After grant of permission an agreement is executed by the applicant as prescribed by the Government.

A proposal with documents to be attached and the conditions in this regard are as detailed below.

2.14.1 How and to whom the application is to be submitted

For proposed concerned with National Highways the application is to be submitted to the Executive Engineer, N.H.way Division concerned and for proposals on below category of roads like State Highways/Major State Highways/Major District Roads/Other District Roads/Village Roads. The application is to be submitted to the Executive Engineer concerned of P.W.D. or Z.P.

2.14.2 Documents to be submitted with the application

1) Copy of current 7/12 extract in confirmation of the ownership of the land.
2) The plan of the land concerned from the Taluka Inspection of Lands Revenue concerned.
3) The detailed plan or chart showing how the utility is to be laid along or across the road.
4) Development plan of the land in question approved by the Town Planning Officer concerned.

2.14.3 Fees /Restoration charges to be paid while submitting the application.

The restoration charges for crossing of Water supply/Drainage/ Agricultural pipe lines of General citizens/farmers are as detailed below for all over the Maharashtra State.

Sr.No	Type of roads surface	National Highways/State Highways/Roads in cities (For per meter length of Trench in Rupees.)	Other Roads (For per meter length of trench in Rs.)
1.	Bituminous surface	1200/-	1000/-
2.	WBM Surface	600/-	500/-
3.	Murmi Surface	250/-	250/-
4.	Road Side Land	60/-	60/-
5.	Paved footpath	1200/-	1200/-

The above rates are applicable from 1.4.2000 and revenue is credited to the head of account "0059 Public works"

After receipt of permission the work of laying/crossing is to be executed by the applicant with utmost care so that there should not be any hindrance / inconvenience to the traffic. An under taking of the applicant will be taken for fully responsible for accident if any, occurs at that spot .

Moreover for proposal of laying /crossing concerned with the Maharashtra Jeevan Pradhikaran, Municipal Corporation/Municipalities etc. The restoration charges as per detailed estimate are to be paid to the Executive Engineer P.W.D./Z.P. in advance.

2.14.4 Competent Authority for grant of permission ?

1) Nationa Highways	Chief Engineer, State P.W.D. (after consent of Ministry of Road transport and Highways, Delhi.
2) State Highways and Special State Highways.	Chief Engineers
3) Major District Roads, Other District Roads	Superintending Engineer, P.W.Circles
4) Village Roads	Executive Engineers Zilla Parishads.

- Period Expected for approval – Three months.
- After approval to the applicant should have to execute an agreement with the Executive Engineer concerned along with necessary fees or restoration charges.
- Enquiry / Booklet of rules can be made available with the Executive Engineer concerned of P.W.D. or Z.P.

2.14.5 Precautions to be taken while laying the Pipe Lines.

The Pipe lines should be laid at least 60 centimeters below surface level of roads.(Please see Govt. of India's circular No.NH-3/P/66/76 dt, 19th November 1976 for National Highways.)

1. While laying Pipe lines across roads an encasing pipe of greater diameter (of 15 cm or more greater diameter concrete or steel.)

2.15 Auction of fruits on road side trees

Number of trees are planted along to road side and Govt. buildings premises. Trees are consisting of Mango, Tamarind, jack fruit etc. The fruits are auctioned every year to obtain the revenue.

Following procedure is adopted for auction

1. Notice of auction is published in news papers, Grampanchayats of nearby villages, Sub Division Officers etc.
2. The place and time of auction is decided in such way that villagers from nearby villages can reach easily.
3. Notice is published well in advance.
4. Terms and Conditions of auction are read before the auction.
5. All the participants has to sign attendance sheet. Nobody can participate without signature or thumb impression.
6. All the doubts regarding terms and conditions are resolved.
7. Security deposit is taken from all the participants. This deposit is returned to unsuccessful participants after the auction is over.
8. If the higher bid received is not proper and justifiable Executive Engineer can reject the auction and recall.
9. Person with maximum offer has to pay full amount immediately. If a person fails to do so his deposit is forfeited and re auction is conducted.

3.0 Buildings

1. The buildings of various Govt. Departments and Local Development Authorities are being constructed. For semi Govt. Bldgs. The plans are prepared from Private Architectures and Technical sanctions are given by PWD for such technical sanctions fees are charged and deposited of Revenue Credits.

2. Buildings under privatization :- The lands available with various Govt. Departments which are commercially important are being developed through enterpreneurs. The development includes construction of offices from Govt. Depatments and balance upfront value to be deposited as Revenue Credits.

3. Government Building Works

    A. Green Building Concept
    B. Conservation of Non Conventional Energy.

3.1 Building works

Constructions of buildings for P.W. Department and other departments such as courts, police, revenue, health etc. are carried out by P.W.D. These generally includes budgeted works, deposit contribution works, minor original works and repairs works.

3.1.1 Budgeted Works :

The demands of these works are made by the user departments to the P.W. Department. Accordingly the P.W. Department prepares block plans and estimates of these works, and submit to the concerned department for approval. The administrative approval is accorded to these works by the user departments and included in budget. These works are executed as per availability of the funds.

3.1.2 Deposit Contribution Works

In case if the funds are readily available with the user department the plans and estimates are prepared and submitted to user department for administrative approval. In the estimate 5% centage charges on civil portion and 8% centage charges on electric portion are considered as per the P.W. Department G.R. No. CNC-1003/PRAKASHAN97/ARTH dated 20.10.2003. Generally full funds are deposited by the user department against A.A. cost.

3.1.3 Minor Original Works :-

The work of additions and alteration of buildings comes under this categories. For such works plans and estimates are prepared by P.W. Department and submitted to user department for according administrative approval and for placement of funds. After receipt of approval and funds the works are taken in hands.

3.1.4 Repairs of buildings works : -

For the upkeeping and safety of buildings the repair works are carried out from time to time . (P.W.D. manual cl.no.173) For this purpose PWD has established the service centers. The information of these service centers has been given in the manual separately.

3.2 P.W.D. Service Centres

2.2.1 The service centers are established for the complex of Government building where complaints are registered daily and the solution to complaints are carried out immediately. In this complaint registers are maintained at each service centres. The complaints regarding maintenance and repairs are registered by the users of the buildings.

3.2.2 The head of the service centers is a road karkoon. On the basis of complaints noted the complaints are categorized according to gravity and carried out through current repair works immediately. Special repairs and specified type repairs works are tackled after getting approval from the competent authority.

3.2.3 The duty of the head of the service centers is to carry out the works of complaints through available skilled labour (Such as carpenter, mason, plumber etc.) and through unskilled labours daily. After carrying out the repair work, the signature of concerned complainer is taken in the complaint register.

3.2.4 In a PWD service center there are 10 to 15 persons which includes one carpenter, one mason, and one plumber. The skilled labours are having the necessary machineries / tools with them. The necessary urgent material for repairs works are kept ready in the service center.

3.2.5 At service center the current repairs are taken immediately whereas repairs of large scale are categorized and proposed in repairs programmes. Such large scale repair works and works which are suggested by the PWD officer after inspection and also the works which are suggested by the user departments during yearly scheduled meetings are proposed under repair programs in 3 catagories for the approval of competent officers. The works are carried out as per availability of funds.

These repair works consists of

1. Current repairs
2. Special repairs
3. Capital type repairs (Specified)

The places where the Service Centers are not available the duty of Service centers is carried out by the concerned P.W. Sub Division.

3.3 Government Rest Houses

Well before independence the British Government had established rest houses of various important tourist spots of pleasant climatic conditions located across the 3 lakh sqkm. area of Maharashtra and / or costal area of 720 km. long konkan cost of Maharashtra state. But after independence, various projects are taken up by the Government of Maharashtra for development of various amenities for the residents / common public of Maharashtra. So it became necessary and important to provide residential amenities to various Government officers, Government workers and representatives of public.

Some villages areas still not connected properly to the road network. Rest houses and other amenities may not be available at such un connected places. Considering this fact, P.W. Department had established rest houses at all district head quarters, Tehasil headquarter, cold air places, pilgrimage holy places, tourist places etc. various MLA's, Govt. Officers, Peoples representative etc. can stay and do the public work at all such rest houses.

Total 563 rest houses are there in Maharashtras 35 district with total 2120 rooms. Government Officers and public representatives can stay in these rooms at subsidy rates.

There are rest houses at Mahabaleshwar, Matheran, Khandala, Khuldaba, Chikhal dara etc. could climatic places. There are 18 special and 19 common rooms at Mahabaleshwar. The reservation for it can be done at Mantralaya P.W.D. Department from 1st April to 15 June and 15 October to 15 November. For the remaining time the reservation can be done by the Executive Engineer P.W. Division Pune and Satara in the respective quota rooms in 15 Novermber to 31st March. The rest house remains closed during 16th June to 14th Oct. due to heavy rains.

Use of Govt. Rest houses, rules of reservations, their rents, other rules of rest house are given at other place in this booklet. Govt. of Maharashtra had circulated the rent of rest house and proper use of rest houses. Main points of that circular are as follows.

3.3.1 Reservation :-

1 Reservation at all other rest houses done at respective P.W.Division excluding following rest houses. Mahabaleshwar rest house done by Mantralay P.W., Rest houses at Mumbai done S.E.P.W. Circle, Mumbai., Ravi Bhavan at Nagpur, Circuit house at Pune done by Collector, Matheran rest house done by S.E. S.P.C. Circle, Konkan

Bhavan, Navi Mumbai. Special care is taken by PWD for giving reservation to V.V.I.P's.

2. Reservation can be done through the web site of Govt. of Maharashtra called as www.mahapwd.com
3. Pre intimation of minimum 7 days is required for reserving the room in rest houses. The application received later than this are considered according the availability of rooms.
4. As per the circular published by the Hon. President of India Dated 4th August 1979, priority for the reservation is as under.
   - Governor of Maharashtra
   - Chief Minister
   - Speaker of Legislative Assembly /Chairman of Legislative Council / Chief Justice of high court.
   - Lokayukta
   - Hon. Ministers / Judge of highcourt.
   - Deputy Speaker of Legislative Assembly and Deputy Chairman of Legislative Council
   - Hon. State Ministers
   - The Members of Legislative Committees.
   - Public representatives (M .Ps. / M.L.As./M.L.Cs.)
   - State Govt. officers and staff on duty.
   - Central Govt. officers and staff on duty.
   - State Govt. officers and staff not on duty.
   - Other State Govt. officers and staff on duty.
   - Ex.M.Ps/M.L.As /M.L.Cs / Freedom Fighters / Retired Govt. Officers/ Staff .
   - Journalists. (Accredition card holder)
   - Private persons.
5. Due care shall be taken while issuing reservation to Hon. Minister/State Minister/Judges of High court. Responsibility of such VIP person vests with Public Relation Officer of Collector officer.
6. As mentioned in para-4 priority of reservation should be given to Judges of High court. Registrar of high court shall intimate at least two days in advance to Executive Engineer and District Collector about reservation Hon. Judge should review reservation and facilitates from registrar.
7. Private persons has last priority. For private persons a letter or telephone message may be not be given due weightage. Reservation priority is based on person actually occupying suite and not be name the suite is reserved .

8. Before handling suite identify of person will be called. Person asking suite and name in which suite is reserved is verified by concerned Manager or staff on duty.
9. If a person having reservation not coming the other persons shall not be allotted the same suite.
10. Entry of name, time, date, address, post shall be entered in the register by the accupant before before handing over suit.
11. No one shall be allowed more than one suit at a time.
11. Reservation slip shall be forwarded to concerned Rest house by reservation making authority. Executive Engineer has to make such arrangement.
12. Reservation slips shall be displayed on Notice board of Rest house.
13. Reservation is valid for 24 hours only. Period is from 9 am to 9 a.m. of second day.
14. Suite Reservation shall be restricted to only seven days.
15. Persons accompanied with VIP's or personal assistant will be allotted suite if available. Separate reservation shall be made to them otherwise
16. right to cancel. Suite reserved or allotted is reserved. In that case suite shall be vacated immediately.
17. In case of emergency for VIP suits already reserved and occupied can be vacated by intimating them and/ or making alternative arrangement to them.
18. Journalist with Accredition Card holders shall be alloted reservation according to priority.
19. Security deposit of Rs.100/- for rest houses at Kahdala, Matheran, Khultabad, Chikhaldara and Rs.200/- for rest house at Mahabaleshwar shall be taken. This deposit for rest houses at hill stations shall be Rs.500/- per suite. Executive Engineer has to collect this amount during reservation. This deposit is then adjusted with rest house charges. If excess returned or if short recovered from user.

3.3.2 Reservation of Maharashtra Sadan New Delhi

The suite reservation of Mahrastra Sadan at New Delhi is made by the Desk officer, Desk 20 A General Administrative Department, Mantralaya Mumbai (Tel.No.22025932). But generally the reservation is possible for those person who are on Govt. duty due to limited number of suites.

3.3.3 Reservation of Mahabaleshwar Rest house

The reservation at Mahabaleshwar if available in the seasonal period from 1st April to 15th June and 15th October to 15th November is being done at Mantralaya by Desk Officer P.W. Department Mantralaya Mumbai.(Tel No.22025057) of submission of duly prescribed form. An amount of Rs.200/- towards security deposit shall be taken for reservation . If reservation is not available the said security deposit is returned within two months of applied.

3.3.4 Arrangement of Meals :

Meals are arranged at Govt.Rest Houses at District Places with prior intimation. The meals can be made available if there is sufficient facility at Taluka places and intimated in advance.

3.3.5 DETAILED INFORMATION BOOKLET

Further, a booklet giving information of Rest Houses is published by the Public Works Deptt. and is made available for sale at Govt. Central Press, Charni Road, Mumbai. All details of Rest Houses with their telephone numbers, contact addresses for reservations etc alongwith the consolidated information is given in the booklet.

3.3.6 Table of Accommodation Fee

(G.R. No. Reservation 2001/CR-77/MI-VY-2 dated 19/10/2002 w.e.f. 1/11/2002)

	The known guest of Central and State Govt./State Govt. Minister/High Court Judges/State Ministers/Member of Legislative Council/M.P./ M.L.A., Govt. Officers of State Govt. on duty, Nominated Officers of Z.P.,/State Govt. staff on duty/ Authorised Journalists, Official members of State Govt. Committee	Officers on duty of Central and State Govt./Staff/ Ex.M.LA./M.P./ Officers of State Govt./Staff not on duty/Retd. State Govt. Officers/Staff.	Others/Private Persons (Ordinary Suites)	Others/Private persons (A.C.Suites)
	Per Day	Per Day	Per Day	Per Day

	Exist-ing Rate Rs.	Revis-ed Rate Rs.	Exist-ing Rate Rs.	Revis-ed Rate Rs.	Exist-ing Rate Rs.	Revis-ed Rate Rs.	Exist-ing Rate Rs.	Revis-ed Rate Rs.
1) Rest Houses at Mumbai	10/- Per person	20/- Per person	20/- Per person	50/- Per person	100/- Per Suite	500/- Per Suite	100/- Per Suite	750/- Per Suite
2) Cottages at Ravi Bhavan, Nagpur	20/- Per Person	50/- Per person	40/- Per Person	80/- Per person	500/- Per Suite	2000/ Per Cotta-ge	750/- Per Suite	500 Per Cotta-ge
3A) Special Suites at Mahabaleshwar	10/- Per person	20/- Per person	20/- Per person	50/- Per person	100/- Per Suite	600/- Per Suite	--	750/- Per Suite
3B)VIP Suites at Mahabaleshwar	10/- Per person	20/- Per person	20/- Per person	50/- Per person	200/- Per person	500/- Per Suite		1000/- Per Suite
4) VIP Guest House Circuit House, Rest House at Revenue Head Quarter places,	10/- Per person	20/- Per person	20/- Per person	50/- Per person	200/- Per Suite	500/- Per Suite	--	1000/- Per Suite
5) MLA Rest House at Nagpur /Mumbai	10/- Per person	20/- Per person	20/- Per person	50/- Per person	100/- Per Suite	500/- Per Suite	--	750/- Per Suite

6) Rest Houses at District Places	10/- Per person	20/- Per person	20/- Per person	50/- Per person	100/- Per Suite	200/- Per Suite	--	300/- Per Suite
7) Rest Ho-uses at Mahabale-shwar, Khan dala, Matheran, Khultaba, Chickldar a	10/- Per person	20/- Per person	20/- Per person	50/- Per person	75/- Per Suite	500/- Per Suite	--	750/- Per Suite
8) Rest Houses at Other Places	5/- Per person	10/- Per person	10/- Per person	20/- Per person	50/- Per Suite	200/- Per Suite	--	300/- Per Suite

3.4 Fixation of Rent for Buildings

3.4.1 Government of Maharashtra has given instructions regarding issuing the rent certificate for the private building which are accommodated for government use vide Public Works Department marathi circular No. RNT/1084/890/Karasan/Milkat vyavasthapan – 3 dated 23rd April 1984.

Before fixation of rent, the user department should obtain necessary certificate for non availability of Govt. accommodation from concerned Executive Engineer P.W.D.

3.4.2 Then the user departments should submit the rent proposal in prescribed form.

1. Form 1 and 2 , Form 1 will be submitted by the owner of building & Form 2 will submitted by the concern department.
2. Approved plan of the building in original or attested certified copy.
3. Certificate from concern department regarding the available area in the building is sufficient.
4. 7/12 abstract , Form 8.
5. Consent of the owner of the building.
6. Details of staff, officers and their post sanctioned by Govt. of Maharashtra along with sanction letter.
7. The purchase or sale index in the area in which building is situated from the concern Deputy Registrar Class I or Deputy Registrars (Mahasul)
8. The recent receipt of the taxes paid to the Municipal Corporation/ Grampanchayat authority.
9. Completion certificate
10. Agreement between owner of building and user department on stamp paper costing Rs. Twenty.

3.4.3 After receiving the proposal along with above forms and other papers, the Executive Engineer will call for report of the Deputy Engineer concern. Deputy Engineer will inspect the site and submit report to the Executive Engineer. The report will scrutinized in the office of the Executive Engineer and rent / revised rent certificate will be issued.

3.4.4 Procedure for rent fixation.

1. Valuation of the building on the basis of type of construction i.e. plinth, flooring, walls, roof, doors / windows, year of construction of the buildings, the depreciation and maintenance cost etc. is carried out. In this 6% interest and 2% maintenance cost is considered with total amount.
2. After this valuation of the land used for the building is obtained from concern Deputy Registrar of Revenue department on the basis of

prevailing rates of sale and purchase rates. On this amount 6% interest considered.

3. For fixing the rent of the proposed building expenditure likely to be incurred on water supply, drainage arrangement, electrification is considered and on this total likely expenditure 6% interest and 4.5% maintenance cost is considered.

4. Sum of above 1 to 3 points is the annual rent of the proposed building.

Though the rent is fixed as per the steps 1 to 4 maintained above. The Executive Engineer has to take care about the conditions mentioned in Government circular date 16.2.1987 before finalizing the rent, the conditions are as listed below.

1. The Executive Engineer should process the rent case proposals only received with due recommendation from concern head of the department and office in charge, and no proposal received from private institutes and owners should be entertained.
2. While issuing rent certificate it should be clearly mentioned that the rate is inclusive of all taxes or otherwise.
3. While submitting the proposals to executive Engineer for rent fixation / revision of rent of the building or land where rent act is inforce the user department should clearly mentioned in the proposal about the enforcement of rent act because it is the responsibility of the concern administrative department who is hiring building to take cognigence of the rent act and obtain the protection applicable as per this act.
4. While issuing the rent certificate it is necessary to mention the name of premises, name of building, name of owner, area of buildings to be rented monthly rent and also the validity period of this rent certificate in the certificate.

3.5 Facilities for physically handicapped

3.5.1 Guidelines providing facilities to physically handicapped persons in residential and office buildings are issued vide Govt. circular No. Bdg-1290/CR-66/Buildings-1 dated 31.3.1990 and BDG-1098/CR-298/Buildings-2 dated 31.5.1999.

3.5.2 While constructing office and residential buildings following special facilities are to be provided (All special facilities shall be as per Indian Standard Institute code for "Recommendation for building and facilities for the Physical Handicap ") No.IA 4963:1968.

A) Residential Buildings :

Of the total tenements, at least 1% to 2% tenements on ground floors shall be provided with following special facilities for physically handicapped persons.

1) Ramp with handrail from ground to plinth level shall be provided with the care that slope of the ramp shall be maximum 1:12 (If ramp cannot be provided because of non availability of sufficient land then in such case instead of ramp wheel chair lift should be provided.)
2) Flooring of rough shahabad or rough Tandur shall be provided. Polished surface shall be strictly avoided.
3) In toilets European type W.C. pan shall be provided with flush controlled at lower level and grab arms. Doors width shall be enough for easy movement of the wheel chair.
4) Special types of revolving doors and grab arms shall be provided with the care that door width shall be enough for easy movement of wheel chair.
5) Threshold to door shall not be provided.
6) Electrical switches shall be provided at such a lower height that they can be operated easily by sitting in the wheel chair.
7) For the guidance of handicapped persons information boards giving details of location of facilities shall be provided.

B) OFFICE BUILDINGS

In addition to the facilities provided in residential building following additional facilities shall be provided in office building on ground floor.

1. In case of multi story building lift of sufficient size to accommodate the wheel chair shall be provided.
2. In lift information in "Brail mode" shall be given.
3. At least one separate toilet for handicapped ladies and gents with special facilities shall be provided at ground floor. In this toilet special facilities like European type W.C. pan with grab arms at lower level and door of sufficient size for easy movement of wheel chair shall be provided.

3.6 Inspection of Cinema/ Video halls

Cinema halls / Video hall located at big villages, taluka and district places are main source of entertainment for informity Government of Maharashtra has framed rules and regulation with guidance for construction, operation and maintenance. These rules are turn as Maharasta Cinema Talkie rules 1966. All temporary and permanent structures showing cinemas are treated as talkies / theatre. These rules are updated time to time to suit the requirement.

3.6.1 Theatres are classified in following categories.

1) Permanent 2) Quasi-Permanent
3) Touring 3) Drive-in-Theatre

Type (1) Permanent Theatres –

Theatres showing moving pictures and constructed with stones, bricks, earth, lime or other non flammable material.

Type (2) Quasi permanent –

Theatres built with iron angle, iron bullies etc. or like non flammable material.

Type (3) Touring Theatres –

Theatres in which stage, machinery and its structure is movable from one place to other.

Type (4) Drive in theaters --

Theatres which is open and viewers can se picture while sitting in the vehicles. The number of vehicles are limited to 1000.

3.6.2 No objection certificate and permission is granted by District Collector / Superintendent of Police / Commissioner of Police. Validity of permission may vary from 3 month to 2 years. Before construction of theatre the owner has to obtain permission for construction from competent authority. For obtaining such permission owner has to submit application along with plans, lay out of land a detailed plan of cinema theatre and also information required for civil construction. Plan, elevation and sections along land plan, stairs, open space, roof, door, windows, fire fighting provision, toilets, parking, water supply / drainage system, internal roads, electrification etc. details are to be submitted along with application to revenue department.

3.6.3 For comments of civil structures like stability, type of construction etc. application is forwarded to the Public Works authorities (Executive Engineer)

Executive Engineers has to issued no objection certificate along with his observation thereto. NOC is also required for addition and alteration. On completion of construction for new talkies. Officers inchange of Sub - Division has to take review of permission an actual construction. Permission is cancelled if addition and alteration done illegally.

3.6.4 Permission of theatre is to be renewed every year. Amount of fee for renewal depends upon seating capacity, period of renewal type of theatres etc. Maharashtra talkies rules 1966 consist guidance and format for NOC. Sale of tickets, electrification etc.

3.6.5 Above mention rules are not applicable to the theatres built before 20th December 1950. District Collector is authority for sanctioning permission and P.W.D. is concern with part 3,5 and 6 of said rules. Other details are available with P.W.D. Sub Division taluka level and Division officers at district levels.

3.6.6 Rules for issuing NOC for theatre are included in Maharasta Talkies Rule 1966. Also instructions issued by Government from time to time are followed.

3.7 Maintenance and Repairs of Buildings

3.7.1 The main aim of P.W. Department is to maintain , repair and keep in good condition government public building. Time to time maintenance and repairs of buildings so as to increase buildings life and increase in utility period.

Government building are classified into two main parts.

1. Residential Buildings 2. Non residential buildings

Classification of building as per financial norms of repairs and maintenance is as per below.

A-group – Administrative building

B- group – Residential building

C-group – Hospital building.

3.7.2 As per Maharashtra P.W.D. para 377 Superintending Engineer has to keep the record of Government building in his circle. Concern Executive Engineer has also to keep the record of Government building in his division. In this register details regarding such as year of construction, plinth area, name of concern user department, period of use, details about major specified repairs carried out etc. is necessary. Record of all buildings constructed by government, purchased or taken in possession by government, should be kept uptodate.

3.7.3 Type of building repairs

Following are the 3 types of repair for maintenance of buildings

- Specified repairs (SDR)
- Special repairs (SLR)
- Current repairs (CR)

(A) Specified repairs (SDR) :

Under this repairs programme items for structural, strengthening of building to increase the life and for safety purpose of building are mainly included. Vide Government P.W.D.Circular No.BPL-1290/CR-595/Bldg dated 10.4.90

SDR – (1) Replacement of broken old roof tiles, Renovation of roof by providing A.C. cement sheets.

SDR –(2) Replacement of rotten doors, windows and their renovation.

SDR-(3) To prevent the leakage, repairing the water supply and drainage line.

SDR – (4) To maintain the structure of building by providing gunitting, grouting and rust preventive method.

SDR-(5) Renovation of outdated electric wiring.

SDR –(6) Replacement of outdated electric motor, pump set, lift etc.

SDR-(7) The outer face of wall always remains wet and if it is the cause of leakage, new cement plaster should be provided.
SDR-(8) Providing water proofing treatment to stop the leakage and dampness .
SDR-(9) Improvement of necessary drainage system and also to carryout the work of drainage system to drain out the water surrounding the building.
SDR-(10) Reconstruction of old and crack brick pillars and walls.
SDR-(11) Replacement of roof in rainy season.
SDR-(12) Renovation of damaged flooring

B) Special Repairs (SLR) :

(Govt. PWD Circular No.BPL-1290/CR-595/bldg dated 10.4.1990)

This type of building repairs are different than current repairs which are to be carried out under special repairs after long and prescribed time limit.
SLR (1) – Partial re roofing
SLR (2) – Periodical coloring
SLR (3) – Replacement of water supply and drainage pipe line.
SLR (4) – Coloring to windows, doors and grill work after particular period.
SLR (5) – Replacement of electrical wiring.
SLR (6) – Replacement of wall plaster.
SLR (7) – Miscellaneous items of special repair to the damage of building.

As per Maharasta PWD rule para 197 the estimated works of special repair is considered as current repair work upto its completion. As per original work, the estimate of special repairs is compulsory to approve it from concern Superintending Engineer. Technical Sanction of special repair work is to be accorded by concern competent authority. Special repairs programm will be generally 50% of sanction grant.

C) Current Repairs (CR)-

Current repairs means the regular repairs done after one year. Current repairs and important / essential required repairs are included in this repair programme.
(Govt. PWD Circular No.BPL-1290/CR-595/bldg dated 10.4.1990)

CR (1)- Repairs to features and fastening of doors and windows.
CR (2)- Repairs of frames and shutters of doors and windows.
CR (3)- Repairs of water supply and sanitary fittings.
CR (4)- Providing colouring to doors and windows.
CR (5)- Repairs of flooring / repairs to ground tiles.
CR (6)- Repairs to wall plaster

CR (7)- Repairs to roof, e.g. renovation and replacement of roof tiles / water proofing to roof.
CR (8)- Protective work from rain e.g. fixing of bamboo mat or spreading of water proofing cloth / tarpolin etc.
CR (9)- Maintenance of electrical installation and fittings.
CR (10)- Current items but same nature.
(Ref - Govt. PWD Circular No.BPL-1290/CR-595/bldg dated 10.4.1990)

3.7.4 The estimate of current repair work is to be approved by concern Executive Engineer. Yearly current repair estimate is to be prepared in consultation with the divisional head of concern department of building user. Repairs are to be done with reference to the complaints of users and accupants in Government buildings / residential buildings.

3.7.5 Government has fixed the norms for maintenance and repairs of Govt. buildings. Availability of grant should be as per Govt. circular no.BDG-1088/CR-140/Bldg.-2 dated 19.3.1991.

3.7.6 Yearly maintenance and repairs estimate of building is to be prepared in consultation with the user department. The guidelines are given in the Govt. PWD Circular No.BPL-1290/CR-595/bldg dated 10.4.1990 with reference to this one service station is to be open in building premises and complaint book is to be kept in service station in respect of building repairs.
The additional details of service centres are given in case no.3.2

3.7.7 The norms of building maintenance and repairs are revised by Govt. from time to time.

3.8 Registration of contractors

Civil Section :-

3.8.1 PWD Registration and above class registration who is interested They will apply for registration among these private / personal / company / Government limited company etc are able.

3.8.2 Contractor / Partner / Company shall apply to PWD in particular format .

While applying for Registration information of following points should be furnished.

- Name of the applicant and full address
- Where the firm is a joint stock company, undivided Hindu family, individual or a registered partnership firm (Attested copy of deeds or article of Association to be enclosed)
- Name of person holding the power of attorney (Attested copy of power of attorney is to be enclosed)
- Name of sole proprietors / partner with particulars/ liabilities (Attested copy of partnerships deed to be enclosed)
- Name of bankers and full Address
- Place of Business
- Class in which enrolment is saught
- Contractor has to pay security deposit for each work. If contractor desire to avail facility of exemption from security deposit, in such a case he has to apply separately.
- List of the works undertaken/ executed during a period of three years preceding the date of application
- List of tools and plants in possession of the contractor (Attach separate list)
- Technical qualification and experience of the proprietor or partners and dealing technical employees in the firm (Attach separate list)

- Workshop, machineris, tools and plants owned by the applicant (Location and site of workshop and also full details regarding machines, tools etc. to be given) (Attach separate sheets)
- Whether enlisted in any other Department / Organisation / Other state if so, in which category showing qualifying amount for tender.

- Information of Sr.No.14 A, B of prescribed form

- Uptodate income tax clearance certificate

- Solvency certificate issued by Bank are accepted.

Registration of qualified unemployeed engineer as a contrator.

3.8.3 Unemployeed Engineer, domiciled in Maharashtra who have passed degree or diploma examination are liable for registration in class 6. within 10 year of passing. Following documents are required with application.

1. Diploma / Degree certificate
2. Domicile certificate of Maharashtra State
3. Passport Photo (3 nos)
4. Payment receipt of Registration fee Rs.50/-

Registration of civil Engineering Assistant as contractor.

3.8.4 Applicants with Civil Engineering Assistant certificate holder issued by Board of Technical Education Maharashtra State can get registration in class-7 directly. Other details mentioned above are necessary. Application forms for registration are available with all P.W. Divisions.

Registration for Retired Engineers OR Resigned Engineers

(Ref.G.R.No.CAT/096/CR-172/Bldg-2 date 20.4.1998)

3.8.5 Vide para 7 of above circular the retired engineers or resigned engineers from Government of Maharashtra or any Maharashtra Government undertaking Board are eligible for granting direct registration. This concession may, not be granted to person who were compulsorily retired by way of punishment and with unsatisfactory record of service.

i. Executive Engineers and above person shall get direct registration in Class-5.
ii. Other Engineers at lower level will be enrolled in Class-6.
iii. The resigned engineer of State Government (Junior Engineer and above) may be given registration of Class VII if they resign with less than five years experience.
iv. This concession may be granted to those who apply for registration within five years from the date of their retirement/ resignation. Registration may not be permitted for the first 2 years after the retirement/ resignation except with the permission of Government, for Engineers of the category of Executive Engineers and above.
v. A retired member of the Armed Forces desirous of starting business as an approved contractor may be registered in Class VII.
vi. Simple application supported by a certificate of his service of the Armed Forces and solvency certificate along with registration fees is necessary.

3.8.6 Table for Registration of Contractors

1. The contractors shall be classified according to their financial status and technical capability. The classification, solvency, registration fees, annual turnover and cost of works in hand and officer competent to sanction registration Renewal of registration / Up-gradation are shown below in the following table.

Ref : 1) P.W.D. G.R.No.CAT/CR-172/Bldg-2 dt.20.4.98 and 20.08.98
2) Corriendum No.CAR/1096/CR-172/Bldg-2 dated 21.09.2000
3) Govt. Resolution No.CAT/2006/CR 141/Buildings 2 dt.6.2.2007.

Class	Capable of executing the work estimate to cost upto	Mini-mum solve-ncy lakhs	Registr-ation fees in Rs.	Avg. Annual turn-over Rs. in Lakhs	Cost of work in hand Rs. in Lakhs	Earnest money Deposit for obtaining exemption Rs. in Lakhs	Regist-ration Sancti-oning Autho-rity
1	2	3	4	5	6	7	8
1 A	Without limit	150	7500	300	450	5.00 Lakhs	Secre-tary to Govt. P.W.D.

1	2	3	4	5	6	7	8
B	2500 Lakhs	150	7500				
C	1500 Lakhs	150	7500				
2	750 Lakhs	75 Lakhs	4500	200	300	3.50 Lakhs	- do -
3	300 Lakhs	30 Lakhs	3000	90	150	3.00 Lakhs.	- do -

Class	Capable of executing the work estimate to cost upto	Mini-mum solve-ncy	Registr-ation fees in Rs.	Avg. Annual turn-over	Cost of work in hand	Earnest money Deposit for obtaining exemption	Regist-ration Sancti-oning Autho-rity
1	2	3	4	5	6	7	8
4	150 Lakhs	15 Lakhs	1500	60 Lakhs	80 Lakhs	2.00	CE PW Region
4.A	90 Lakhs	9 Lakhs	1500	40 Lakhs	60 Lakhs	1.50	- do -
5	50 Lakhs	5 Lakhs	750	25 Lakhs	30 Lakhs	1.25	
5A	30 Lakhs	3 Lakhs	750	25 Lakhs	20 Lakhs	1.25	SE PW Circle
6	15 Lakhs	2 Lakhs	750	7.5 Lakhs	10 Lakhs	1.00	- do -
7	10 Lakhs	1 Lakhs	600	1.5 Lakhs	3 Lakhs	--	- do -
8	5 Lakhs	0.50 lakhs	400	1.0 Lakh	1.5 Lakhs	- -	EE PW Division
9	3 Lakhs	0.25 lakhs	400	0.5 Lakh	1.0 Lakh	- -	- do -

Electrical Works

(Ref.G.R.No.CAT-105/05/26/Bldg-2 date 31.3.2005)

3.8.7 Norms for registration of electrical contractors

Class	Capable of executing the work estimate to cost upto Rs.in lakhs	Minimum solvency Rs.in lakhs	Registration fees in Rs.	Avg. Annual turnover Rs.in lakhs	Cost of work in hand Rs.in lakhs	Earnest money Deposit for obtaining exemption. Rs.in lakhs	Registration Sanctioning Authority
1	2	3	4	5	6	7	8
A	Without Limit	8	2000	20 Lakhs	40 Lakhs	1.0	CE (Elec) PWD
B	25	4	1500	10 Lakhs	30 Lakhs	0.50	-do-
C	10	3	600	6 Lakhs	15 Lakhs	0.30	SE (Elec) Pwd
D	7.5	1.5	400	3 Lakhs	8 Lakhs	0.20	-do-
E	2	0.5	300	1 Lakhs	1.75 Lakhs	0.15	EE (Elec) Dins.PWD

For Upgradation and Renewal detailed rules are available with P.W.Department. The information of revised rules is also available with Department.

Registration of Contractors for Interior Decoration works :

3.8.8 The works like Architectural importance, new decoration, furniture / Modular producers/Interior Decorations are of special nature. To do these works of good quality nature, Government has decided to register produces or suppliers /Interior Decorators. Existing Civil contractors willing to execute above works has to get registration in following class.

Furniture / Modular producers/Interior Decorators –Registration
(Ref.PWD GO No.CAT-1096/CR-172/Bldg.2 Dt.11/8/2003)

Class	Works Cost unit (Lakh)	Min. Sol-Vency (Rs.in lakh)	Avg An-nual Turn Over (Rs. in lakh)	Co-st of wo-rk in hand s(Rs. in lakh)	Wor-ks exec-uted (Rs. in lakh)	Tech Staff	Regs Fee (Rs. in lakh)	Regs. Sanc-tion-ing auth-ority	Regs. authority office
1	2	3	4	5	6	7	8	9	10
I-1	No limit	100	200	300	150	Arch -2 ID-4	0.20	Govt.	Chief Arch.
I-2	150	30	75	90	50	Arch -2 ID-2	0.15	Govt.	Chief Arch.
I-3	100	20	50	60	15	ID-2	0.10	Govt.	Dy.Chief Arch.
I-4	50	10	25	30	7	ID 1	0.05	Govt.	Dy.Chief Arch.
I-5	15	3	7.5	10	3	-	0.03	Govt.	Dy.Chief Arch.
I-6	7	1	3.5	3	2	-	0.02	Govt.	Dy.Chief Arch.

Registring authority shall propose registration with following terms and conditions.

A) Private Works in Registration proposal

Certificate of Registered Architect / Engineers in respect of private works executed or in hand is compulsory for furniture/modular/furniture producer/supplier/interior decorator cost considered for works in hand or executed in case of private works is 50% of actual cost.

B) Qualified Architect/Interior Decorator's Direct Registration

1) Person who worked on post of senior Architect or above and retired or voluntary retired after service of minimum 10 years or resigned are entitled to get registration in the I-4 class.
2) Unemployed Graduate/Diploma holder architects can get direct registration in I-5 class.

3) Unemployed interior decorators with Govt. approved course can get registration is I-6 class.
In case of above 2 and 3 proposal no registration fee is charged for 1st registration.

C) Scrutiny /Verification of papers with Registration proposal.

i) After submission of proposal by Furniture/Modular Furniture producer/Supplier to Chief Architect or Deputy Chief Architect, the papers or certificates attached are scrutinised /verified by them with enquiry or visit to the works if felt necessary.

ii) After verification /scrutiny of proposal certificates or papers shall attested by responsible officer of concerned office with signature, name, seal of post and date before submission to Government.

iii) Details of private works included in proposal are to be verified by concerned officer as regards to cost of works as executed by them.

iv) While submitting proposals for sanction of competent authority should include certificate of Chief Architect / Deputy Chief Architect as certified that M/s./Shri. ---------- Class ---------- papers/documents are verified by after contacting to concerned offices.

iv) Proposals duly scrutinised /verified by Chief Architect/Deputy Chief Architect with all norms, term of conditions are submitted to Government for sanction.

v) The proposal with fraudulent documents submitted by Chief Architect, Dy. Chief Architect will result in cancellation of registration and legal procecution through Chief Architect. Also similar action will be taken against concerned persons of office of the Chief Architect / Dy. Chief Architect.

vii) It is obligatory for field officers to execute all works of Furniture /Furniture modulars/Interior decorations shall be carried out through registered Furniture modulars/Furniture producer or Supplier / Interior decorator. Government permission is required if those works are to be executed through unregistered Furniture /Furniture modulars/Interior decorators .

vii) Upgradation and renewal of registered contractors is done with rules and regulations in Government Resolution dated 20.4.1998.

ix) Revenue on account of registration fee is credited to head “0059 Public Works Other revenue.”

4.1 MAINTAINANCE AND REPAIRS OF INSPECTION VEHICLES AND CONTRUCTION MACHINARY

As per Government circular No.MCN-1182/(2288)/Desk-31 dated 29 July 1982, Maintenance and repairs of inspection vehicle and construction machinery (B+CS) is entrusted to mechanical wing. While as, operation, utilization, budget, deployment and establishment is entrusted to civil wing. Criteria regarding repairs and maintenance are as below.

4.1.1 Chief Engineer (Mech.) Irrigation Department is yearly publishing 'Machinery use rates'. On that basis, the block estimates for operation, Maintenance and Repairs are prepared by Deputy Engineer (Mech.), at the beginning of the year, according to machinery available with P.W. / National Highway division. Assistance Chief Engineer (Mech) scrutinizing those Estimates, and recommending to Superintending Engineer (Civil) for according administrative approval and making budget provisions accordingly.

4.1.2 As per Government circular stated above, the machinery owned by that divisions are maintained and repaired as and when required, with the help of Deputy Engineer (Mech.). Sectional Engineers / Assistant Engineers (Mech.) are preparing separate repair estimate on actual basis, and submitting for according technical sanction by Astt. Chief Engineer (Mech.) or Superintending Engineer (Mech.) as the case may be.

4.1.3 As per circular dated 29 July 1982, Executive Engineer is making provision of grants for operation, maintenance and repairs. The repairs and maintenance is carried out through Dy.Engineer (Mech.). Accounts of expenditure incurred on maintenance and repairs is maintained in division office. Repairs estimates are prepared by Junior Engineer (Mech.) under Dy. Engineer Mech. And A.A. is acorded by Executive Engineer civil. Technical sanction to the estimate is accorded by competent authority on per circular no.MCN/1698/11/Machinary dated 26 March 1998. The detailed of expenditure and register are maintained as per Superintending Engineer (Mech.) letter No. Mech./106/12/8315 dated 11 July 1985. After completion repairs, The machinery are send back to concerned office.

4.1.4 Preference is given to carry out repairs by departmental staff or workshops. Machinery is get repaired from authorized / registered private workshops, where sufficient skill staff and adequate equipment, tools are not available. Under supervision of Junior Engineer/Deputy Engineer (Mech) Job work D.S.R. is treated by Superintending Engineer (Mech) in every year. Required spare parts for repairs are procured from local market as per prescribed purchase procedure in the department.

4.1.5 Norms for maintenance and repairs

Sr. No.	Particulars	Norms	Reference
1.	1. Maintenance and repairs of inspection vehicles and machinery. 2.Technical Sanction for OMR estimate and B+C5 component as per requirement. And also as per power delegated vide Govt. letter No. MCN/1698/ 11/Mech. dated 26/3/1998.	As per the norms fixed by Government for use repairs and maintenance. Norms of Annual Utilization of Machinery. (Available working days in a year are 200 days.) 1) Road Roller 8-10 tons – 1000 Hrs. 2) Truck 5 T – 20000 km. 3) Truck 7.5 T – 20000 km. 4) Water Tanker 5 T – 1000 hrs. 5) Water Tanker 7.5 T- 1000 hrs. 6) Tipper 5 T- 20000 kms. 7) Tipper 7.5 T – 20000 kms. 8) Asphalt mixes – 500hrs. /years 9) Crusher /Granulator – 500 hrs. 10) Crawler Tractor – 500 hrs. 11) Mobile bridge – 500 hrs. Inspection unit. 12) Tough Rider – 500 hrs. 13) JCB 1.2 cft – 500 hrs. 14) Wheel Tractor – 500 hrs. 15) Car – 30000 km. 16) Jeep – 21600 km. 17) Mobile Van 3 T – 21600 kms.	Gover-nment circular No.MCN/1182 /(2288) Desk 31 dated 29 July 1982.

4.2 Inspection of Hot Mix Plan and Allied Machinery

4.2.1 The works in P.W. department are allotted and executed by calling open tenders. Majority of road construction works are carried out by using Hot Mix plants and allied machinery of that contractor. For fulfillment of the requirements as per design and tender conditions. Such machinery of contractor is being inspected and certified as per guide line of IRC Delhi and MORT&H letter No. RW-24011/3/2000-RMP (Pt) dated 19th December 2000. Certificate of machinery about its fitness in use is issued for period of one year. Contractors are producing such certificate while demanding blank tender forms.

4.2.2 Contractors are applying to Assistant to Chief Engineer (Mech.) for carrying out Inspection of their machinery. The documents such as ownership, location, 7x12 of land, lease deed, pollution certificate are attached with the application. Prescribed Questionnaire and check list are being supplied to contractor for furnishing technical data by contractor. Inspecting officer is visiting to the site for physical verification of machinery, installation, technical requirements and all documentary evidence. All noting are mentioned in inspection report and certificate is being issued for that machinery.

4.2.3 Inspection of machinery after issuing work order and when work is in progress is carried out by committee framed vide per MORT & H circular No. RW-24011/3/2000-RMP (Pt) dated 19th December 2000. Inspection report is being submitted to Chief Engineer.

4.2.4 After expiry of the date of certificate, the contractors are again applying with the same procedure. Ownership, any technical changes, location etc. are again verified by inspecting officer and then certificate is issued for next one year.

4.2.5 Norms for inspection of hot mix plan and allied machinery

Sr. No.	Nature of function	Norms	References
1	Inspection and certification of Hot Mix Plant, Paver finisher, Vibratory Road Roller, Mechanical spay pump unit	Contractor has to submit following attested documents with application before inspection. i) Application of Contractor ii) Attested copy of invoice for purchase / purchase deed etc.	i)MORT&H circular No.24011/3/2000 dtd.2/11/2000 ii)P.W.Dept

		iii) 7/12 or Lease deed iv) PUC certificate from pollution department. v) Partnership deed attested copy. vi) Brochures for technical detail. vii) Questionnary and checklist as prescribed by MORT& H. viii) Affidavit regarding ownership or other purpose wherever required.	t.Mantralaya's letter No.NHP-2001/Prak-6/NH-1 dtd.8/12/2001 iii) IRC News Delhi circular No.RW-24011/3/2000 RMP (pt) dtd.19/12/2000

Certificate for one year is being issued by Assistant Chief Engineer (Mech.) after verification of documents and visit on site.

4.3 Registration of Spare Part Suppliers and Workshops

4.3.1 The repair works of machinery in P.W. Deptt. are carried out by mechanical wing. Repairs of machinery are commenced after obtaining technical sanction to repair estimate from competent authority. Spare parts are procured locally by calling quotations as and when required without maintaining stock with the deptt. There is variety of machinery make, models with the deptt, hence spare parts are procured locally to avoid blocking of funds.

4.3.2 Preference is given to carry out the repairs in departmental workshop or with departmental staff. But, some times repairs are carried out from private workshops where departmental workshop is not fully equipped or special tools are not available or sufficient skilled staff is not available. The private workshops are registered as per Govt.circular No. STD-1094/28 Desk-Mech. dated 16th July 1996.

4.3.3 Generally in the month of June and December offers for such registration are invited from interested parties by giving notification in news paper. Prescribed blank application forms are available with division at prescribed cost. Interested parties are applying to division with required documents such as shop act registration, sales tax registration, income tax clearance, details of shops and business etc.

In case of private workshop, the documents such as shop act registration, indemnity bond, list of special tools, equipment and skilled workers are also attached with the application.

4.3.4 With scrutiny and verification at division proposal is submitted to Assistant Chief Engineer (Mech.) who along with Deputy Engineer (Mech.) visit the site and issue certificate to that effect. Scrutinised application with signatures of head quarter Executive Engineer and committee member are submitted to region office. After scrutiny by Assistant Chief Engineer (Mech.) and Executive Engineer (V.&Q.C.) proposal with recommendation is submitted to Superintending Engineer (Mech.) Konkan Bhavan , Navi Mumbai for registration. Superintending Engineer (Mech.) after scrutiny convey to receive registration fee from applicant. After receiving report of receipt of registration fee Superintending Engineer (Mech.) issues registration certificate.

Registration is valid for 3 years. For renewal again same procedure as above is adopted. But certificate from Deputy Engineer (Mech.) as regards to satisfactory performance is required.

4.4 Survey Report and Auction of Unserviceable Machinery

4.4.1 In Public Works Department the machinery becomes unserviceable when it has covered assured life, outdated, repair cost is more and uneconomical, or damaged in accident, or damaged in natural calamities or untraceable by theft etc. Such machines are write off by civil division by submitting proposal in prescribed proforma (Profarma no.1 to 4) Machinery is disposed off by way of public auction and revenue is deposited to government with applicable taxes.

4.4.2 The norms of the assured life of machinery in P.W.D.

Nature of function	Norms	References
Survey report and auction of machinery, which has covered its life.	1) Following norms for assured life are fixed by government i) Conventional Truck (5 tone / 7.5 tone) – 2,00,000 km. (10 years.) ii) Tipper (5 tone / 7.5 tone)– 2,00,000 km (10 years.) iii) Tanker (5 tone / 7.5 tone) – 10,000 hrs. (10 years.) iv) Asphalt Mixer (7/5 cft) 5000 hrs. (10 years.) v) Crusher / Granulator- 5000 hrs. (10 years.) vi) Mobile bridge inspection unit -5000 hrs. (10 years.) vii) Tough Rider (1,2,3 tone)- 5000 hrs. (10 years.) viii) JCB (1.2 cft) 5000 hrs. (10 years.) ix) Wheel Tractor -160000 km.- (15 years.) x) Car (Petrol / Diesel) – 160000 km. (15 years.) xi) Jeep (Petrol / Diesel) - 160000 km. (15 years.) xii) Mobile Van (3 Tone)- 160000 km. (15 Years)	Govt. Circular No. Mech/1/06/(12)/8315 dated 1/7/1995

Nature of function	Norms	References
	xiii) Air compressor (300 cft) Portable – 10000 hrs. (8 years.) xiv) Road Roller – (Compactor)- 12000 hrs. (10 years.)	

5.0 Coastal Engineer

5.1 To protect natural coastal region of Maharashtra states have a coastal length of 720 Km, management and development of small ports Government vide G.R.No.EPT-1072/5018510 dated 21/6/1972 has created offices of Chief Port Officer, Hydrographer, Port Engineer and Coastal Engineer in PWD. As per revised policy in 990 Coastal Engineer was attached to Water Transport commissioner controlled by Home Department. This section was then attached to Public Work Department vide G.R.No.EST-1090/6677/CR-25/P-1 dated 30/8/1990. At present Coastal Engineer Circle is working under Chief Engineer, Special Projects (P.W.) Region, Mumbai since July 2003.

5.2 Superintending Engineer from P.W.D. working as Coastal Engineer Office of the Coastal Engineer is located at Collectorate office Mumbai. This circle has there divisions headed by Executive Engineer (Coastal Engineer)at Navi Mumbai, Ratnagiri and Sindhudurg.

5.3 Works and norms for Coastal Engineer are as under—

Sr.No	Particular	Norms
1	FOR HOME DEPARTMENT Construction of Antierosion Bandhara for protecting coastal length and other assets.	Decision regarding anti sea erosion bandhare is taken by Maharashtra MERI time board. Coastal Engineer submit their report to CWP RS PUNE or MERI Nashik after survey. Estimates based on design of CWPRS / MERI are submitted to Maharashtra MERI time board. After administration approval technical sanction upto Rs.25.00 by Executive Engineer, Rs.25 to 60 lakhs by Coastal Engineer(S.E.), and above Rs.60 lakhs Chief Engineer Special Project Region, Mumbai are accorded. The works are Executed there after by P.W.D. procedure.
2	Maintenance & Repairs of Anti- sea erosion Bandhara	As per requirements

3	<u>FOR FISHERIES DEPT</u> Construction of small ports, jetties sloping jetties etc.	As per the demands of Local people small ports for fishing decision of construction is taken by fisheries department and conveyed to coastal engineer. Coastal Engineer submits survey report to Central Institute of coastal engineering and fisheries at Banglore. Estimates are prepared on design of CICEF and submitted fisheries department for administrative approval. Works are executed after due technical sanction and current P.W.D. procedure.
4.	Fish Drawing platforms, Auction halls Approach roads sanc dredging etc	As per requirement

6.0 Electrical Department

Public Works (Electrical) sections are working under Chief Engineer(Ele.) Mumbai, and jurisdiction of Chief Engineer (Ele.) is throughout Maharashtra. There are four Electrical Circle and twelve electrical division are working under Chief Engineer (Elect.). Generally one electrical sub-dn. is located at one District headquarter along with Sectional Engineer electrical.

Function and their norms electrical wings are as under..

Sr. No.	Nature of work	Norms	Reference
1	Electrification & installation of electrical wiring, street lighting, Pumping unit, electrical appliances, generators etc to new Non Residential & Residential Government buildings.	1.National electrical code 2.Indian electricity act 1956 3.Electricity Regulation Act 2003 4.Concerned IS code 5.Power for according technical sanction to original estimate. E.E.(Ele) -3.75 lakhs 6).S.E. (Ele)-3.75 to 12.50 lakhs. 7).C.E. (Ele)- 12.50 & Above. 8) (a)Checking of measurements of works. Sect.Engineer has to record the measurement of works up to Rs.1.50 lakhs. With 25% checking by Asstt.E.E.(I)/Asstt.Engr(I) /S.D.E./Dy.Engr./S.D.O b)Work cost Rs1.50 to 2.50 lakhs--50% Checking c)Work Cost Rs.2.50 lakhs & above ---- 100% checking & E.E.(Elect) has to check 5% of measurements.	1)P.W.D. handbook chapter 16 appendix 42 2)Govt.Res. No.GN-1091/ CR/169/BULD G / 2 / Mantralaya Dtd.7/10/1993 3)G.R.No. DPW/1189/ (57)/Audit, Mantralaya Dtd.18/11/96 4)G.R.No.Mis c./1097/CR-622/bldg. Mantralaya dtd 29/6/1999 5) P.W. Manual appendix24 Rule 11

Sr. No.	Nature of work	Norms	Reference
2	Providing & Installation of Lift for Newly constructed Residential & Non residential buildings.	1)Lift Regulation Act 1939 2) Bombay lift regulation at 1958. 3) I.S.Code	P. W. D. Hand book chapter 16
3	Providing & Installing Fire fighter & Fire Resisting System to newly constructed Residential & Non residential buildings.	1) D.C. Rules 2) I.S.Code 3) Permission from local Municipal Corporation	P.W.D.Hand book chapter 16
4	Inspection of electrical wiring, street lighting, electrical appliances, Pumps transformers, generators lifts & fire fighting equipment's of Residential & Non Residential buildings.	Periodical Inspection is carried by officers as detailed below. • All Govt.Building's inspection by Dy.Engr.(Ele.)—Twice in a year • All Govt.Building's of Area more than 500 Sq.Mtr. inspection by E.E.(Elect.)—Once in a year • Inspection by S.E.(Ele) for all Govt.Buildings having area more than 500 Sq.Mtr.& having more 10 storeyed - once in a year. • Inspection by C.E.(Ele) for all VIP Govt.Building's e.g. Mantralaya,Highcourt, Medical College & C.M. Residence—Once in a year	Govt.Circular No.BDG/108/8 /CR/140 BLDGS-2 Mantralaya dtd 19/03/1991 & P.W.Manual.

Sr. No.	Nature of work	Norms	Reference
	Maintenance & repairs of electrical wiring street lighting, electrical appliances, transformers, generators, waterpump, lifts, & fire fighting, equipment's of Residential & Non Residential buildings.	Type of Govt.Buldgs. Maintaince Rate/Sq.Mts. 1)VIP buldgs -- Rs.20 2)Admn.buldgs -- Rs.13.75 Dist.level. 3)Other buldgs -- Rs.8/- 4)VIP Res.buldgs -- Rs.19.50 5)Other Res.buldgs -- Rs.9.60 6)Hospitals -- Rs.16.50	P.W.Circular No.BDG-1088/CR-140/ BLDGS-2 Mantralaya dated 19/03/1991 & P.W. Manual.
5	Registration of electrical contractors	Registration of electrical contractors in class A to E Class Works Comp. in last 3 years Rs.lakhs — Works in hand Rs. Lakhs A 60 — 40 B 30 — 30 C 18 — 15 D 09 — 8 E 03 — 1.75	P.W. manual Appendix 11
6	Quality inspection of works	Dy.Engr(Elect) V&Q C Working under CE(Ele) are inspecting the works Minimum 500 works to be inspected within year History sheets log books, & TS Registers are also inspected by them Major & Minor CR & SDR Works are also inspected by them	PW Manual